

DX-CP28 Instruction Manual

-Foreword

Dear user. The following is the product information and instructions for use.


-Packing list

DX-CP28*1

Adhesive Cotton Pads*1

Instruction manual*1

-Product Show

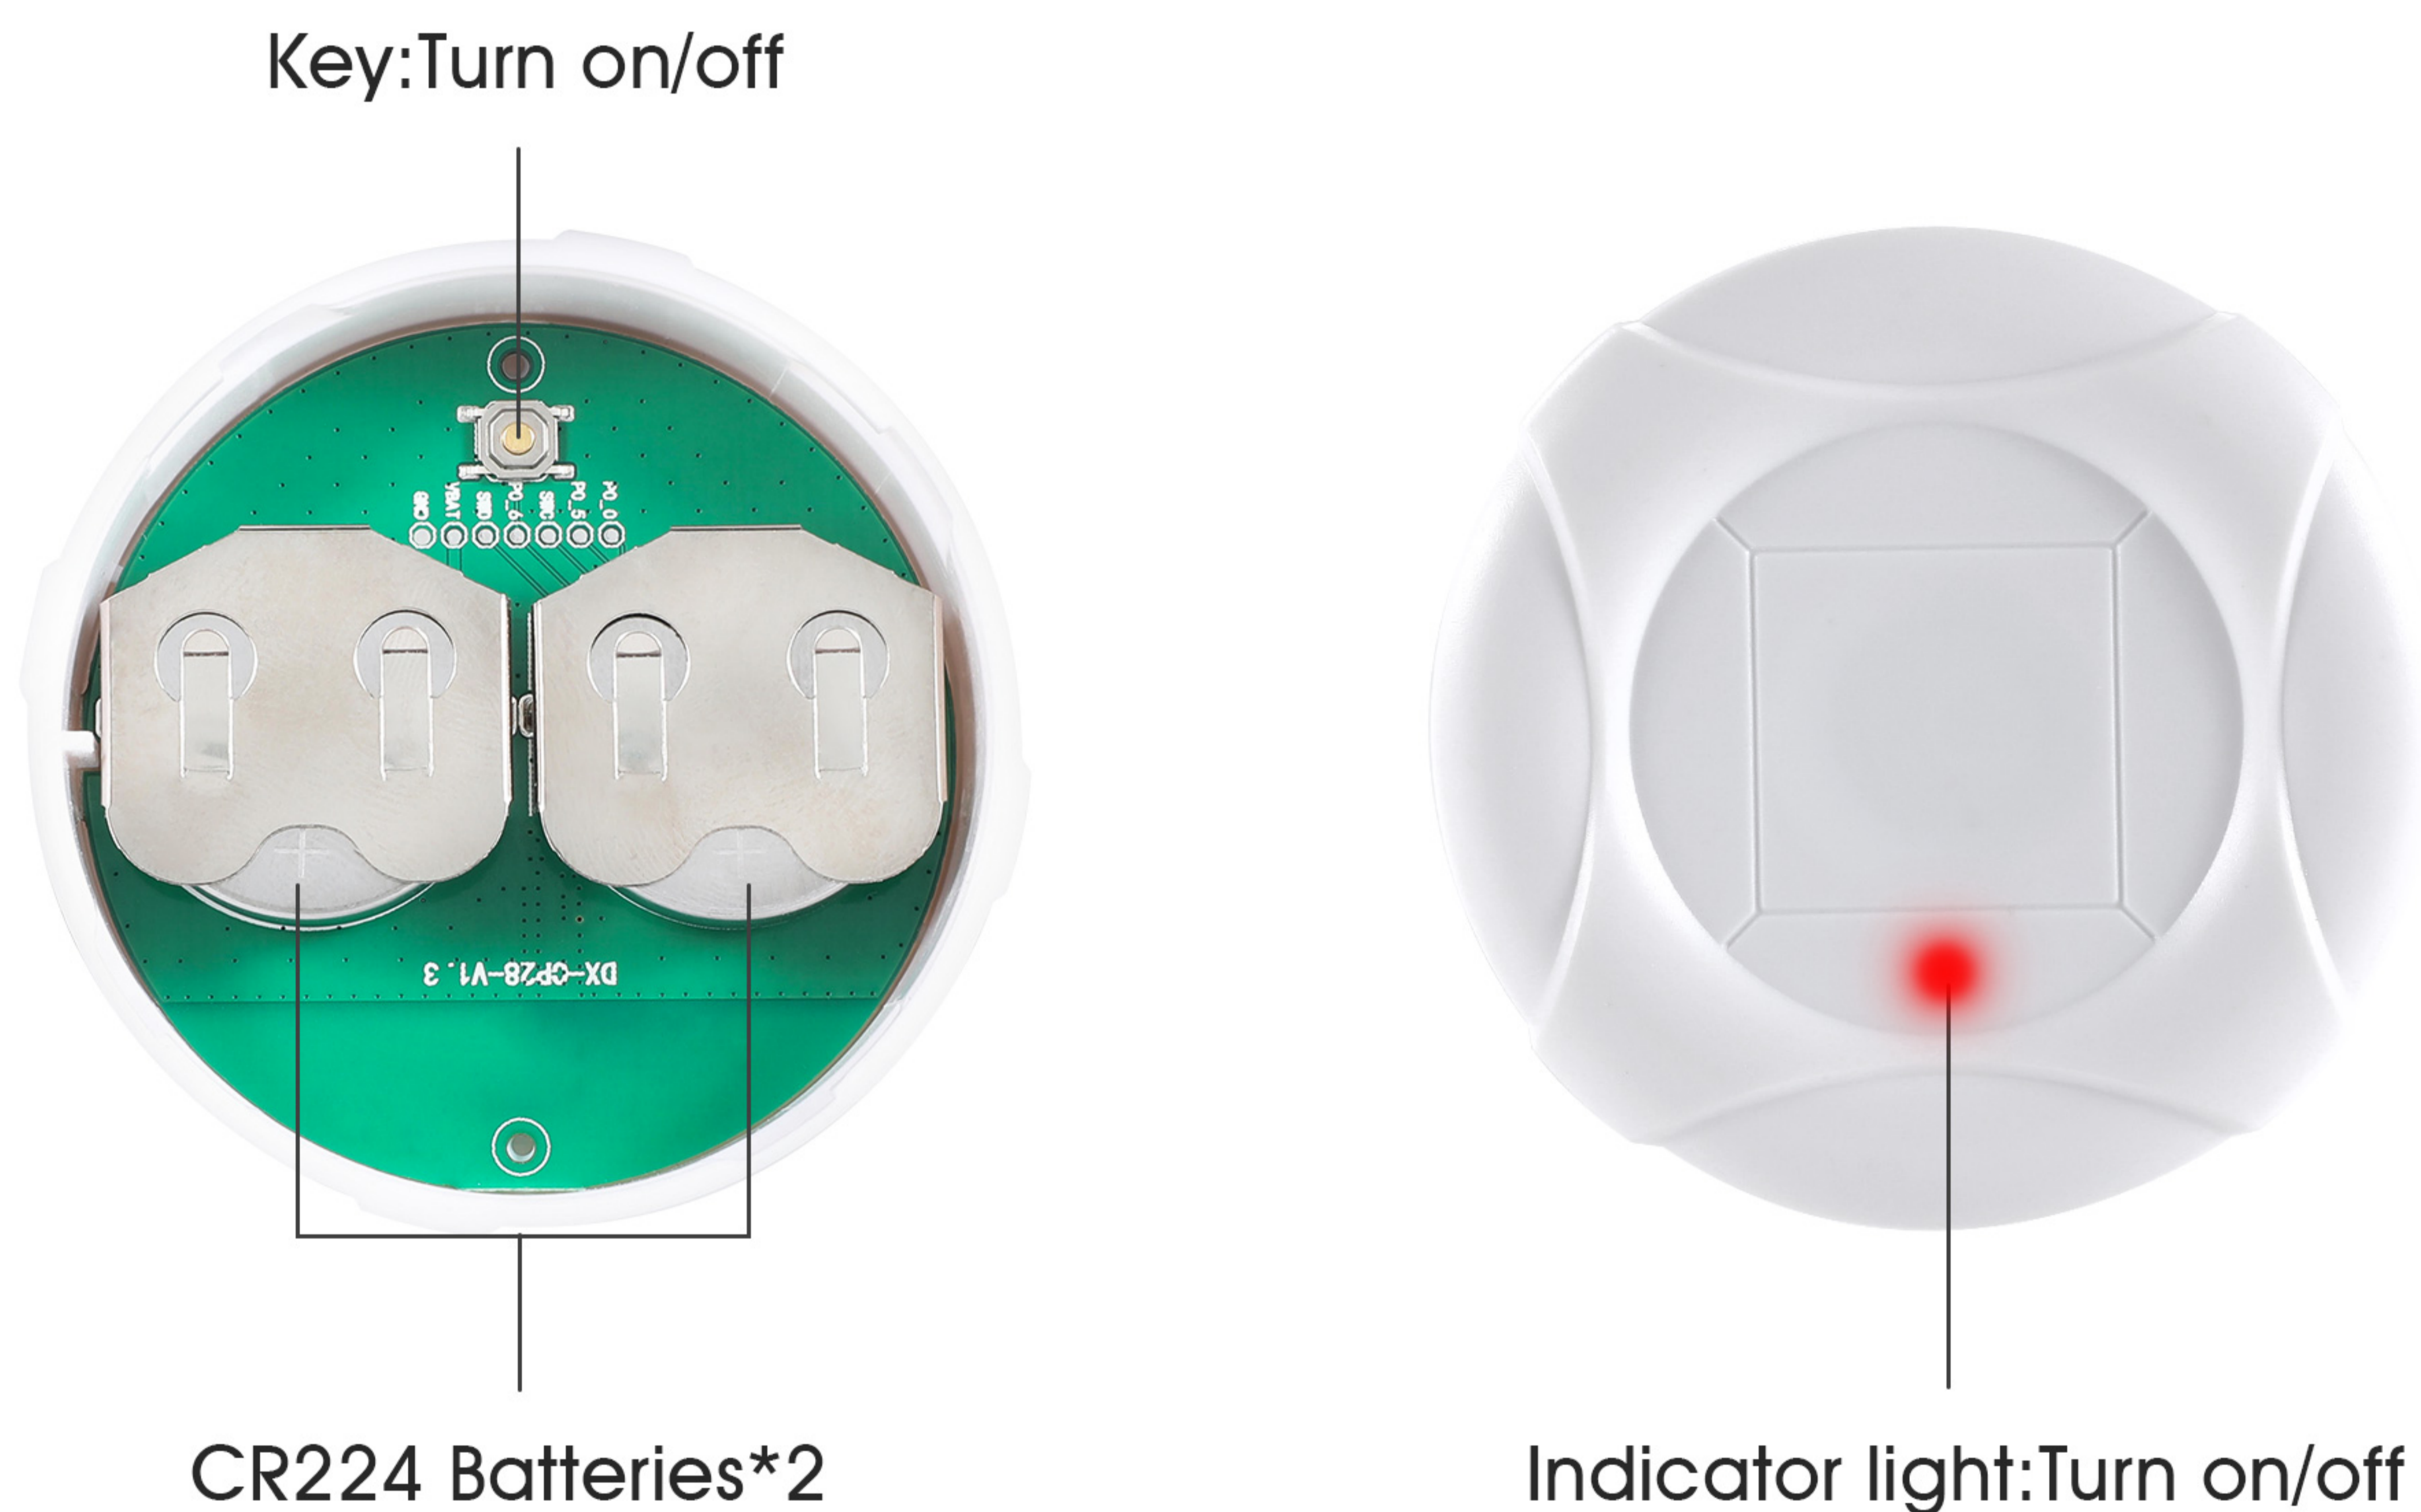

-Product Show

Android APP download:

- ① Contact customer service to send the APP installation package
- ② en.szdx-smart.com → support → data download → development tool → Mobile app


IOS APP download:

Apple Store→Search DX-SMART→Download


-Connecting and changing parameters

Open the back cover (rotate the back cover in the OPEN direction), click the button to turn on the device.

- ① Power on: Long press 2s, the red light on the back will blink once.
- ② Shutdown: Long press 6s, the red light on the back will blink twice.


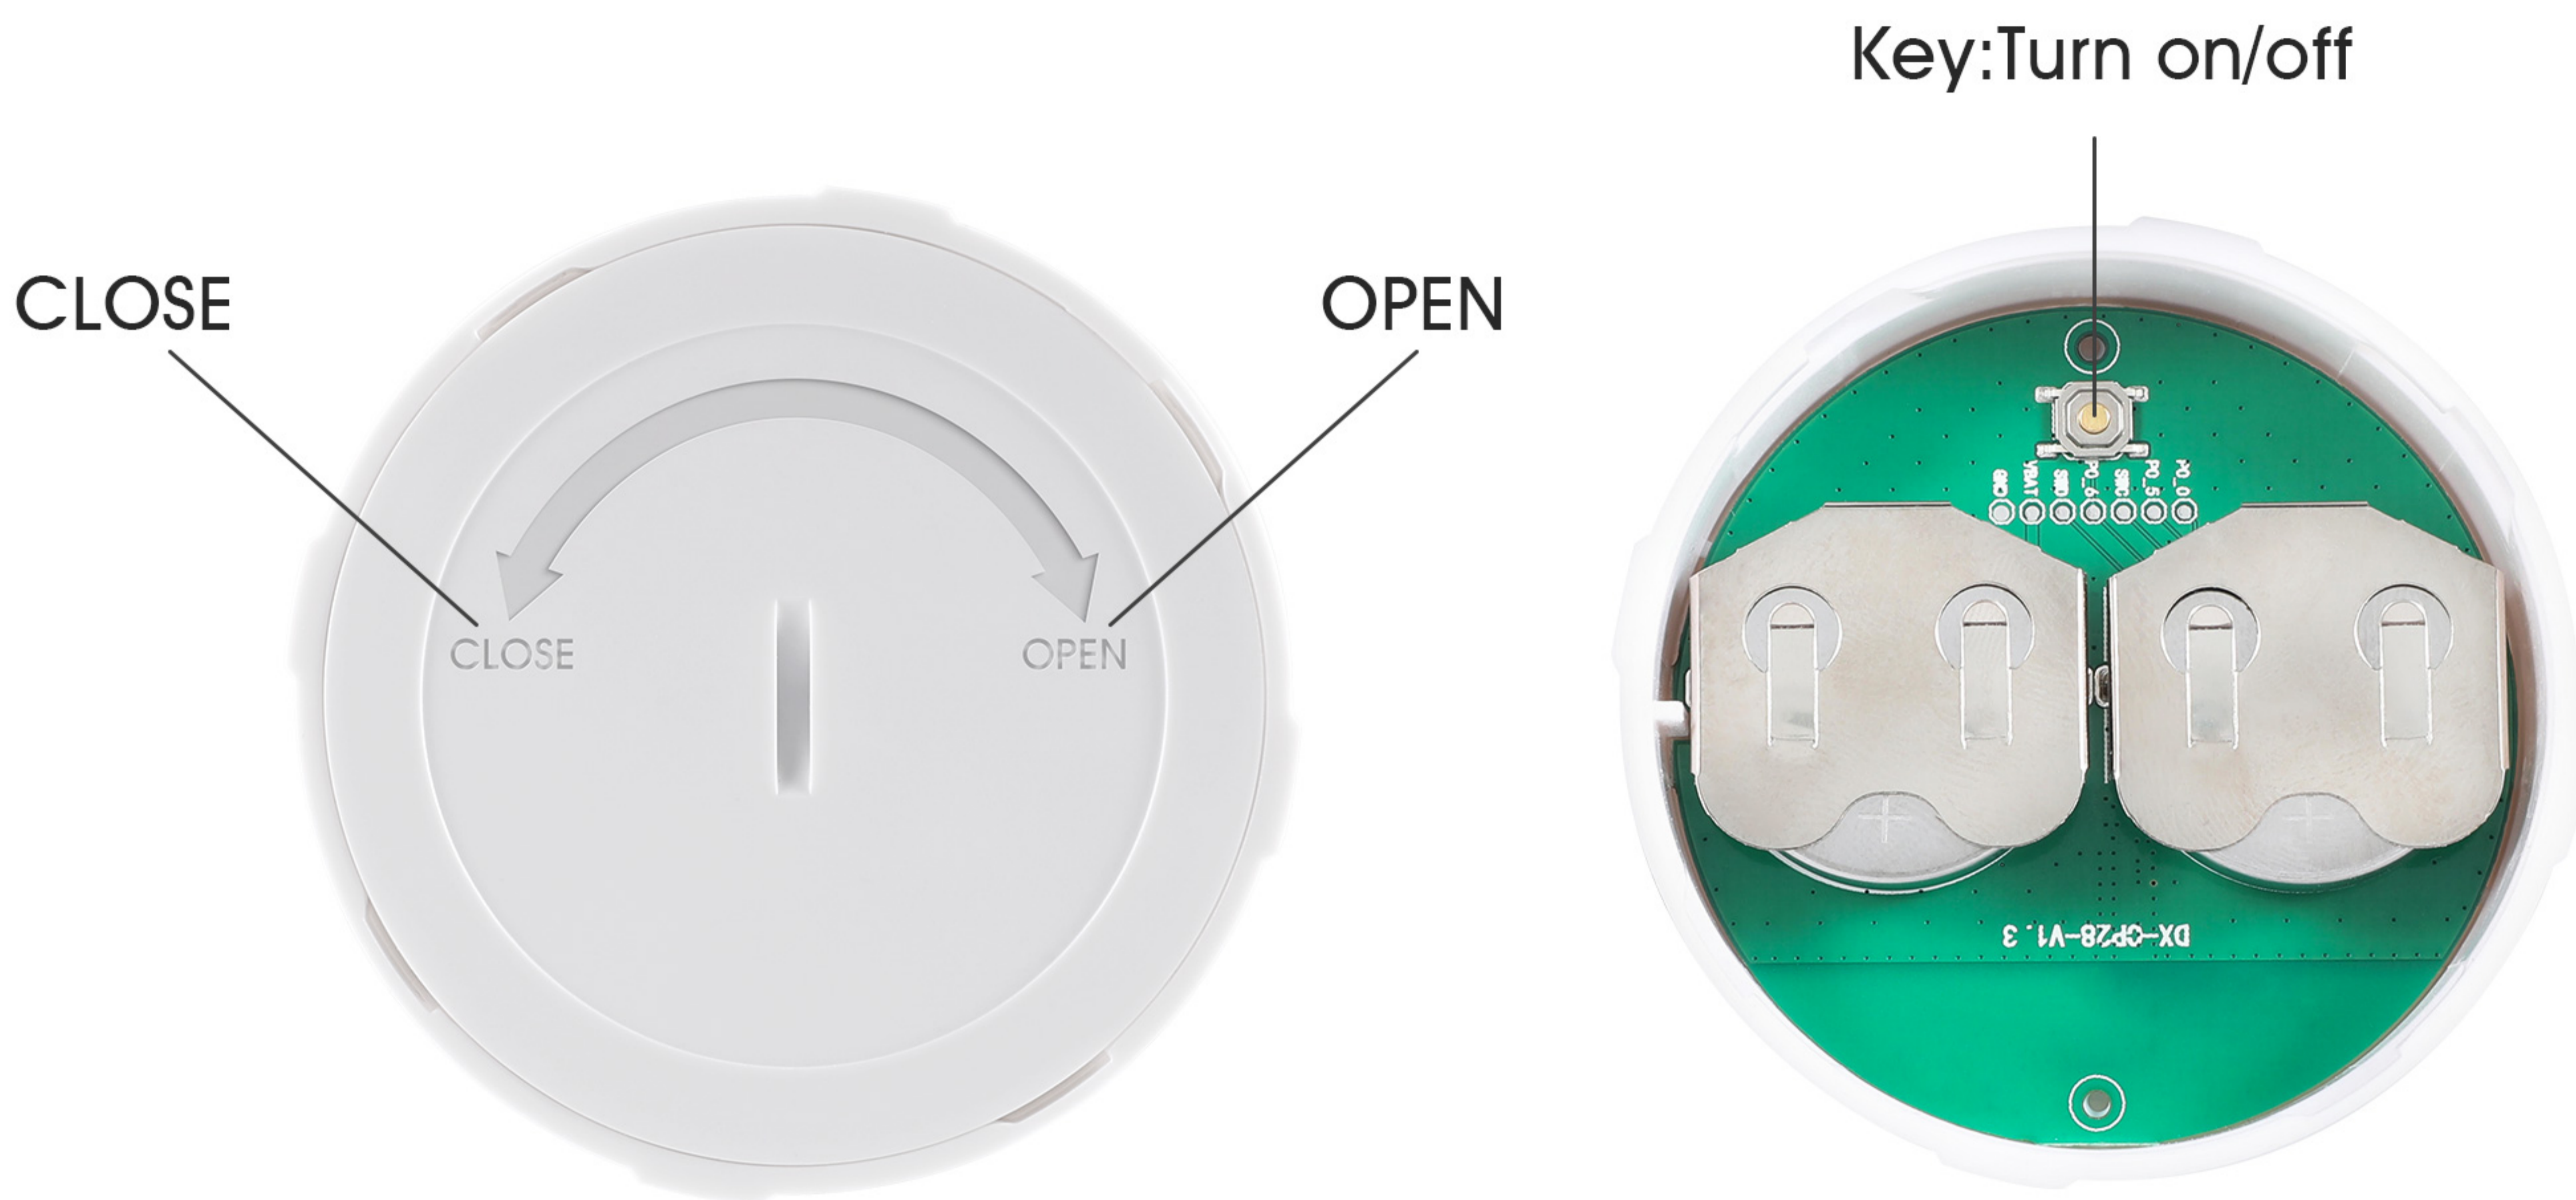


- ① Check the MAC code on the side of the enclosure.
- ② Open the DX-SMART APP and select Beacon Connection.
- ③ Find the corresponding MAC code, which needs to correspond to the one on the left side of the case.


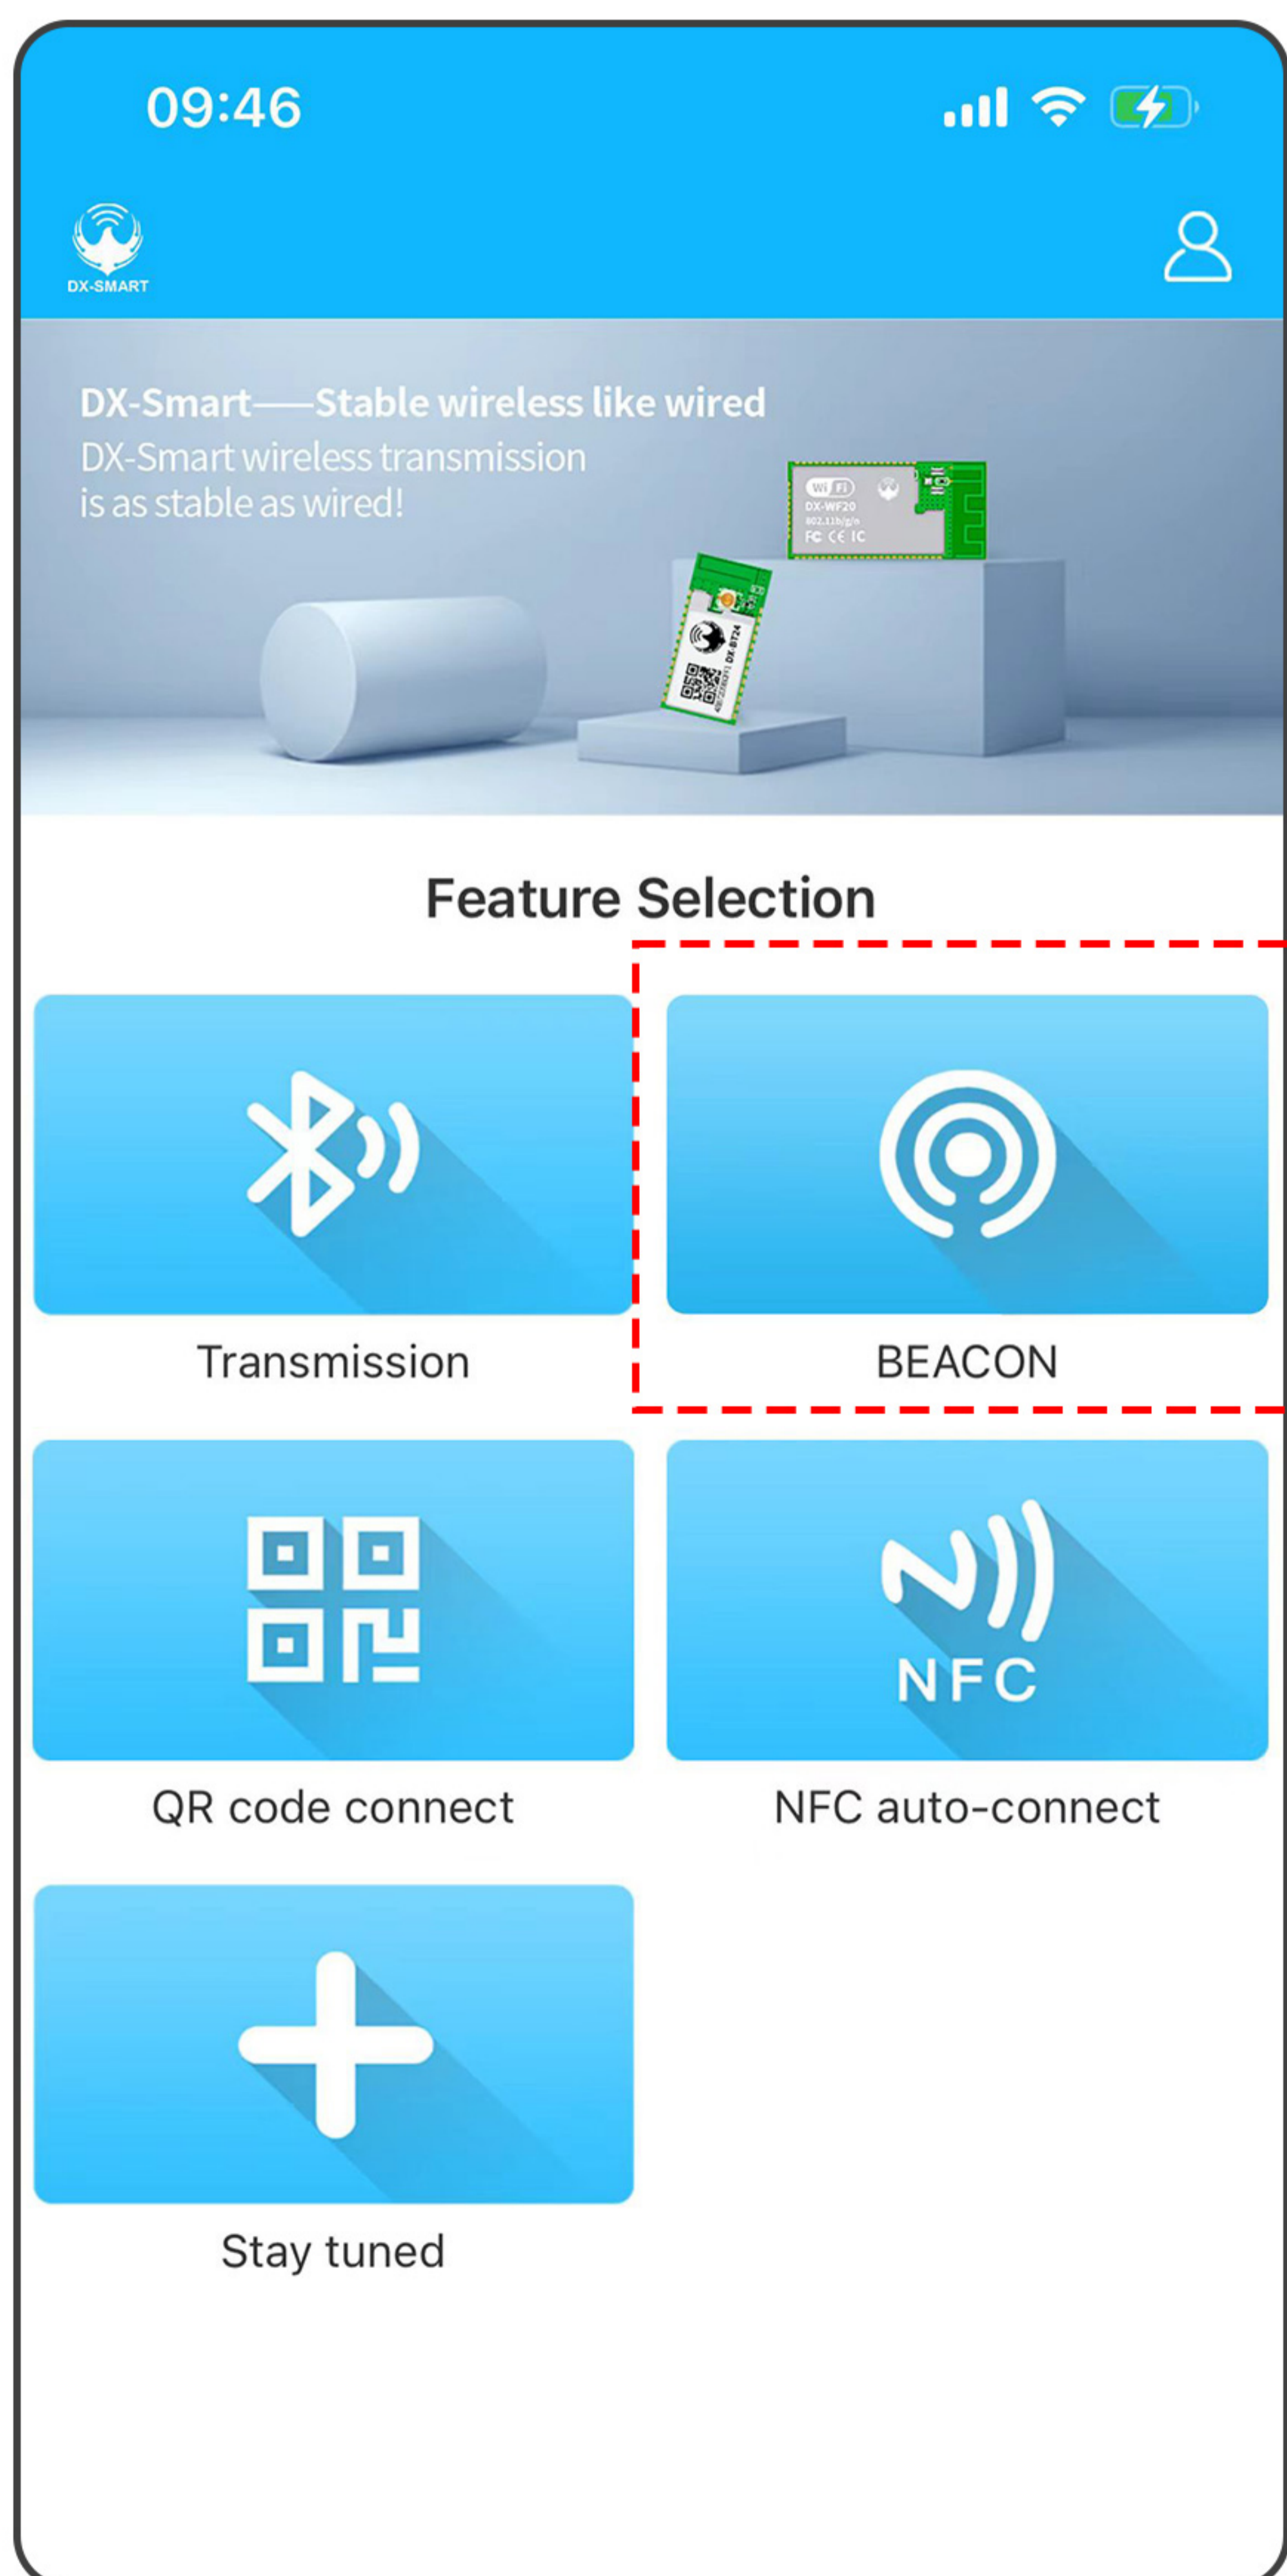


CP28	48:87:2D:74:4C:05	
RSSI: -72	MAJOR: 11111	CONN: YES
Tx: 2.5dBm	MINOR: 33333	100%
FDA50693-A4E2-4FB1-AFCF-C6EB07647825 12.59m		
UID	Namespace id	e5a4a7e5a48f31323334
	Instance id	44584c29191a
	RSSI@0m	-24dBm
URL	URL	http://www.szdx-smart
	RSSI@0m	-24dBm
TLM	Battery voltage	3318mV
	Temperature	25°C
	ADY_count	379470




Connection is successful, Beacon will blink red light for a while.

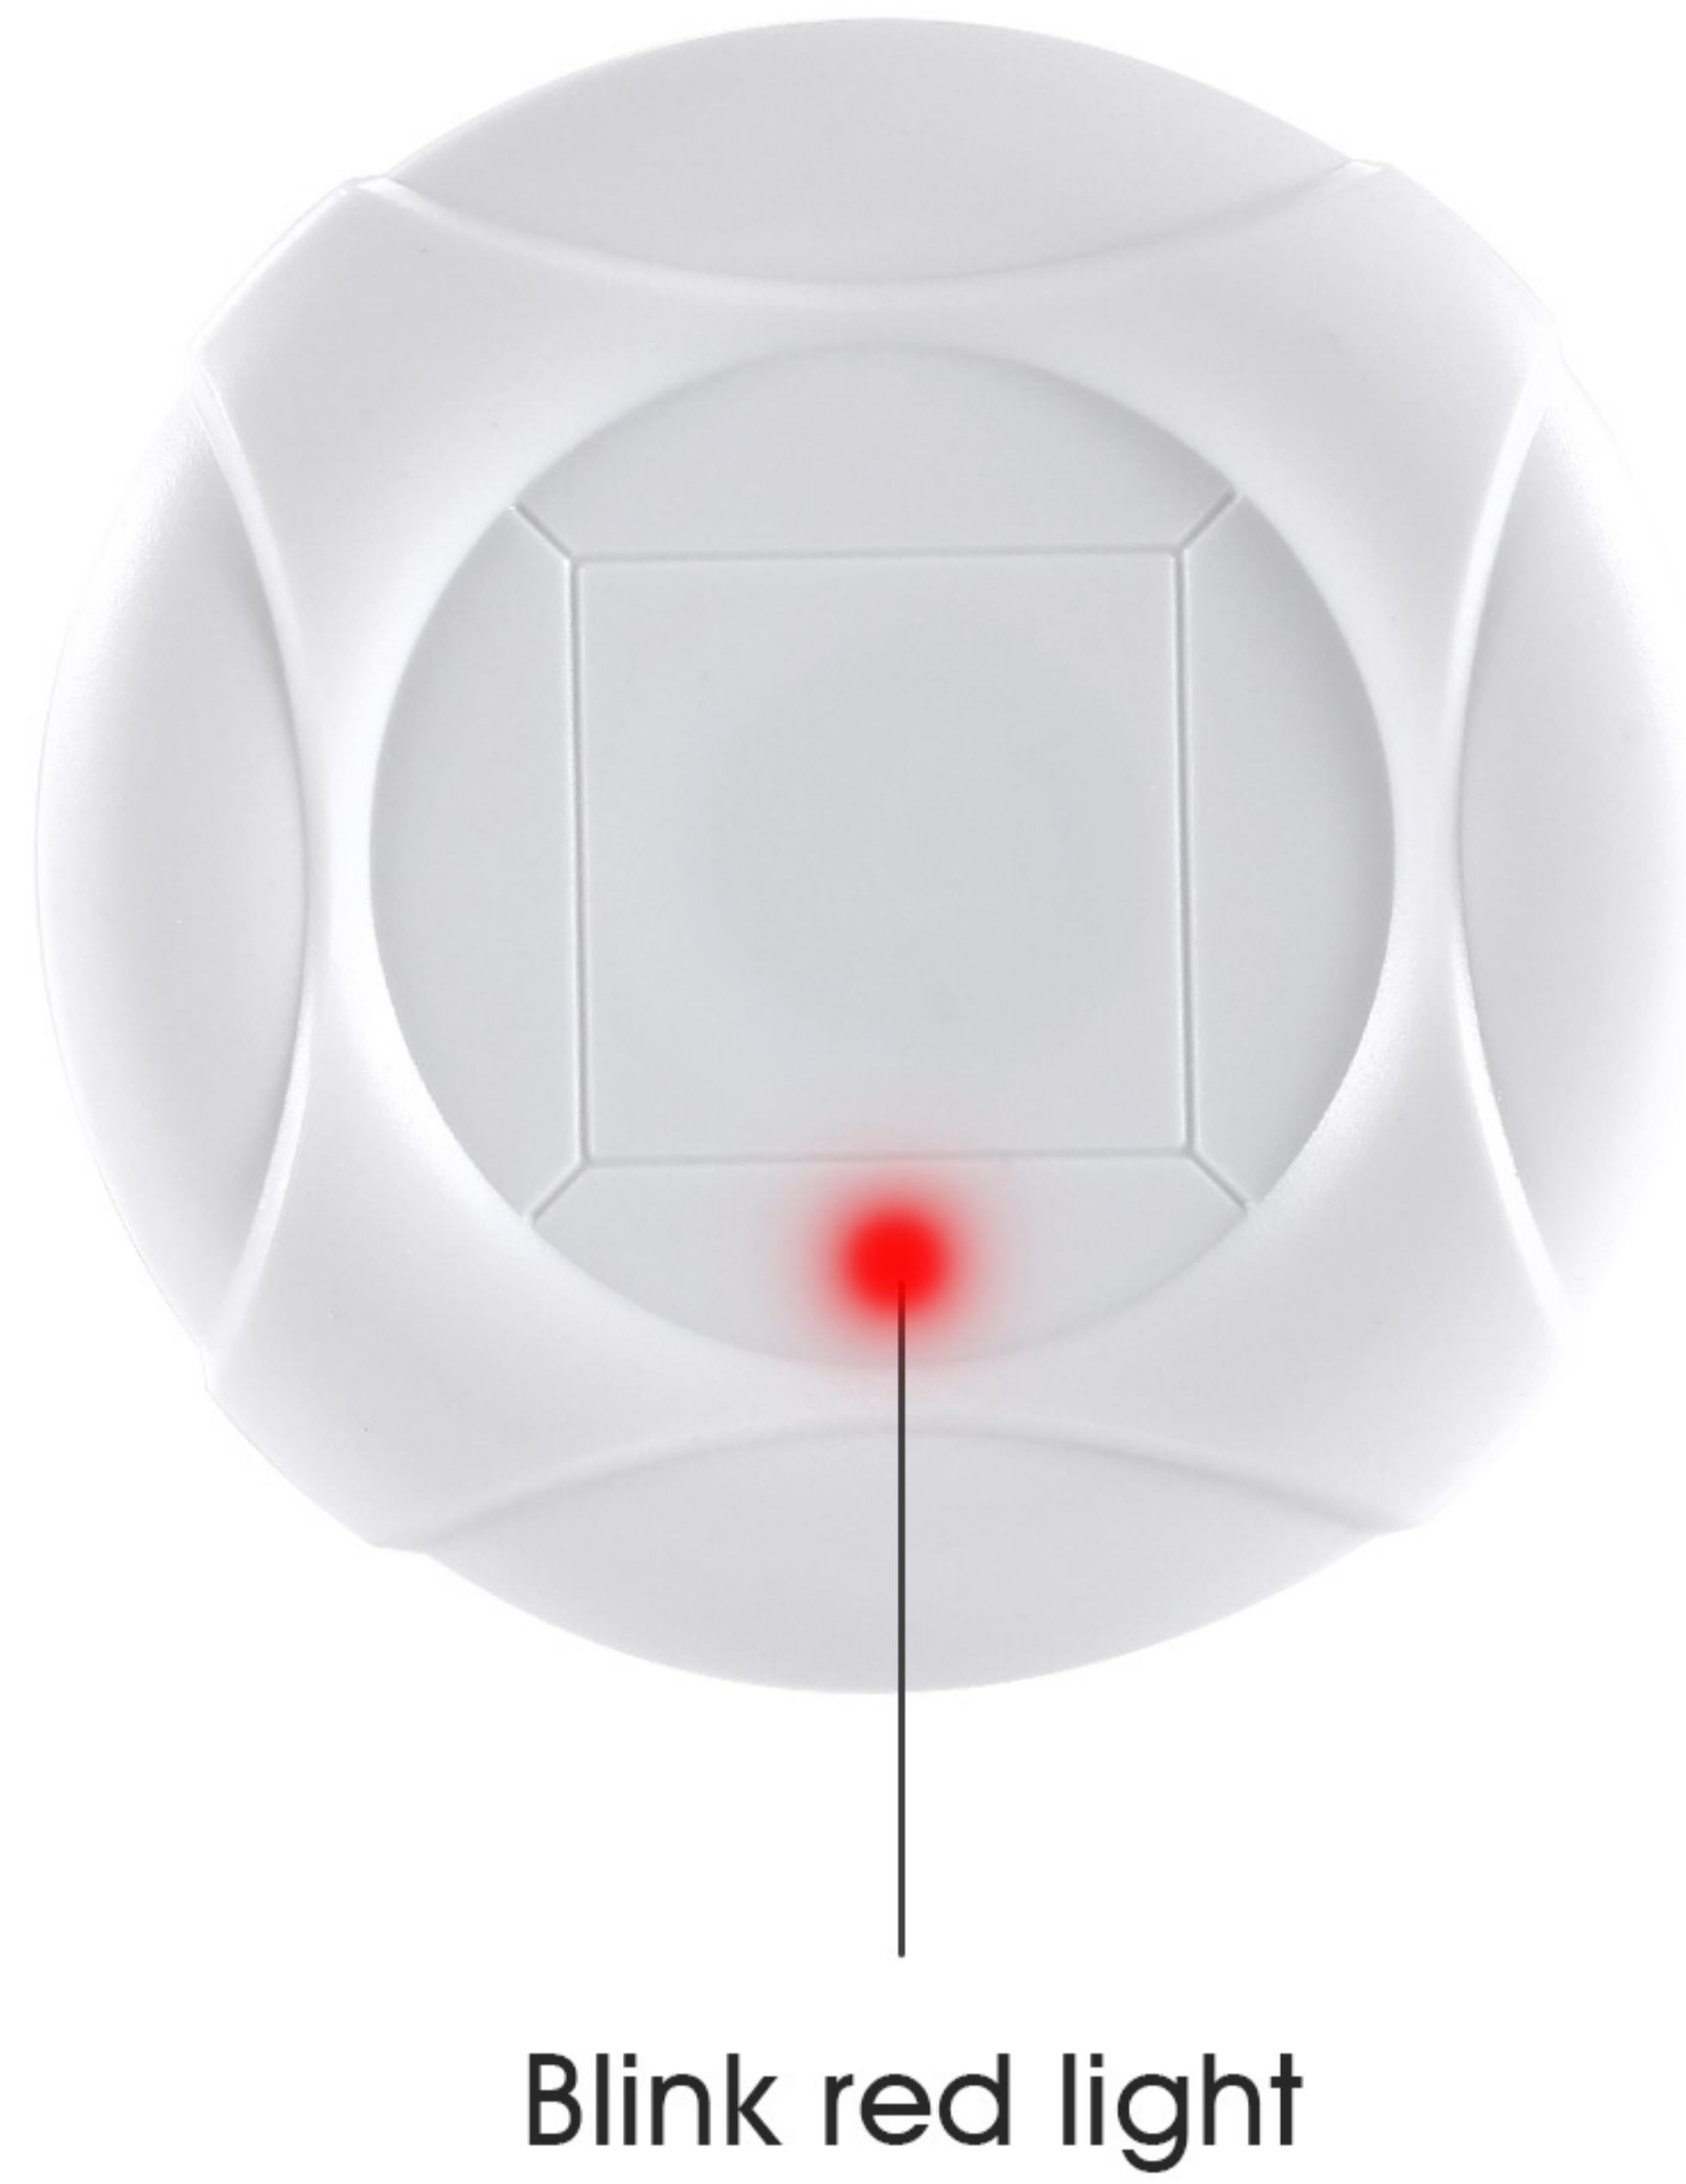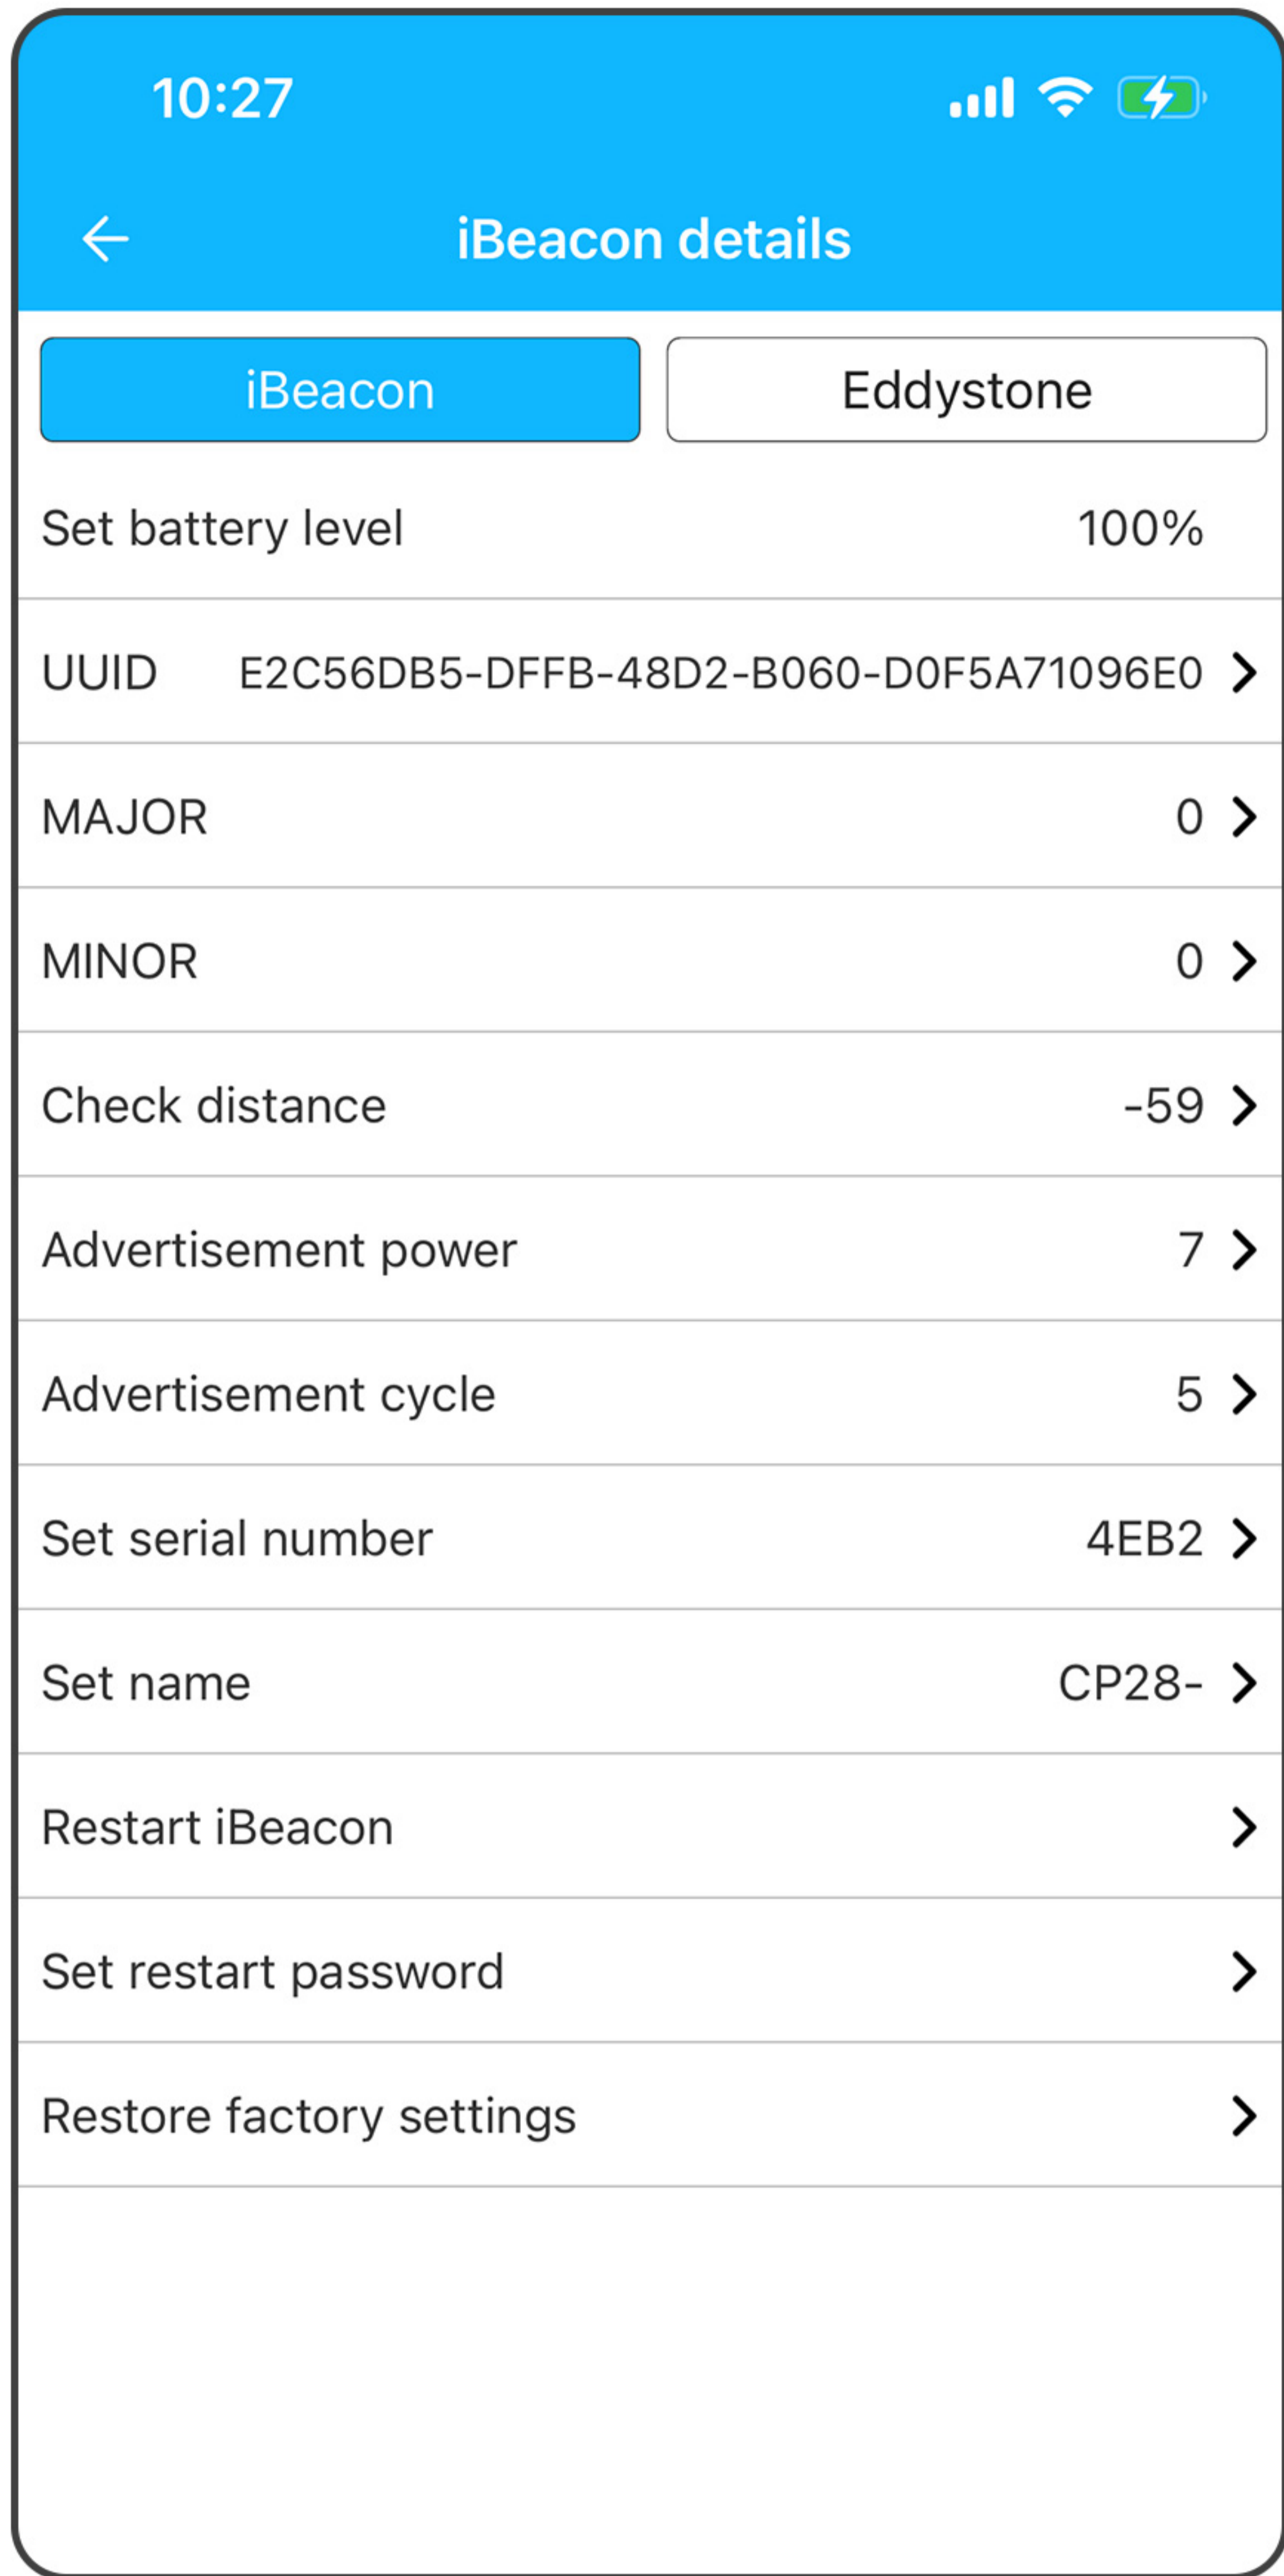

Change the UUID, then save, save successfully Beacon will blink red light.


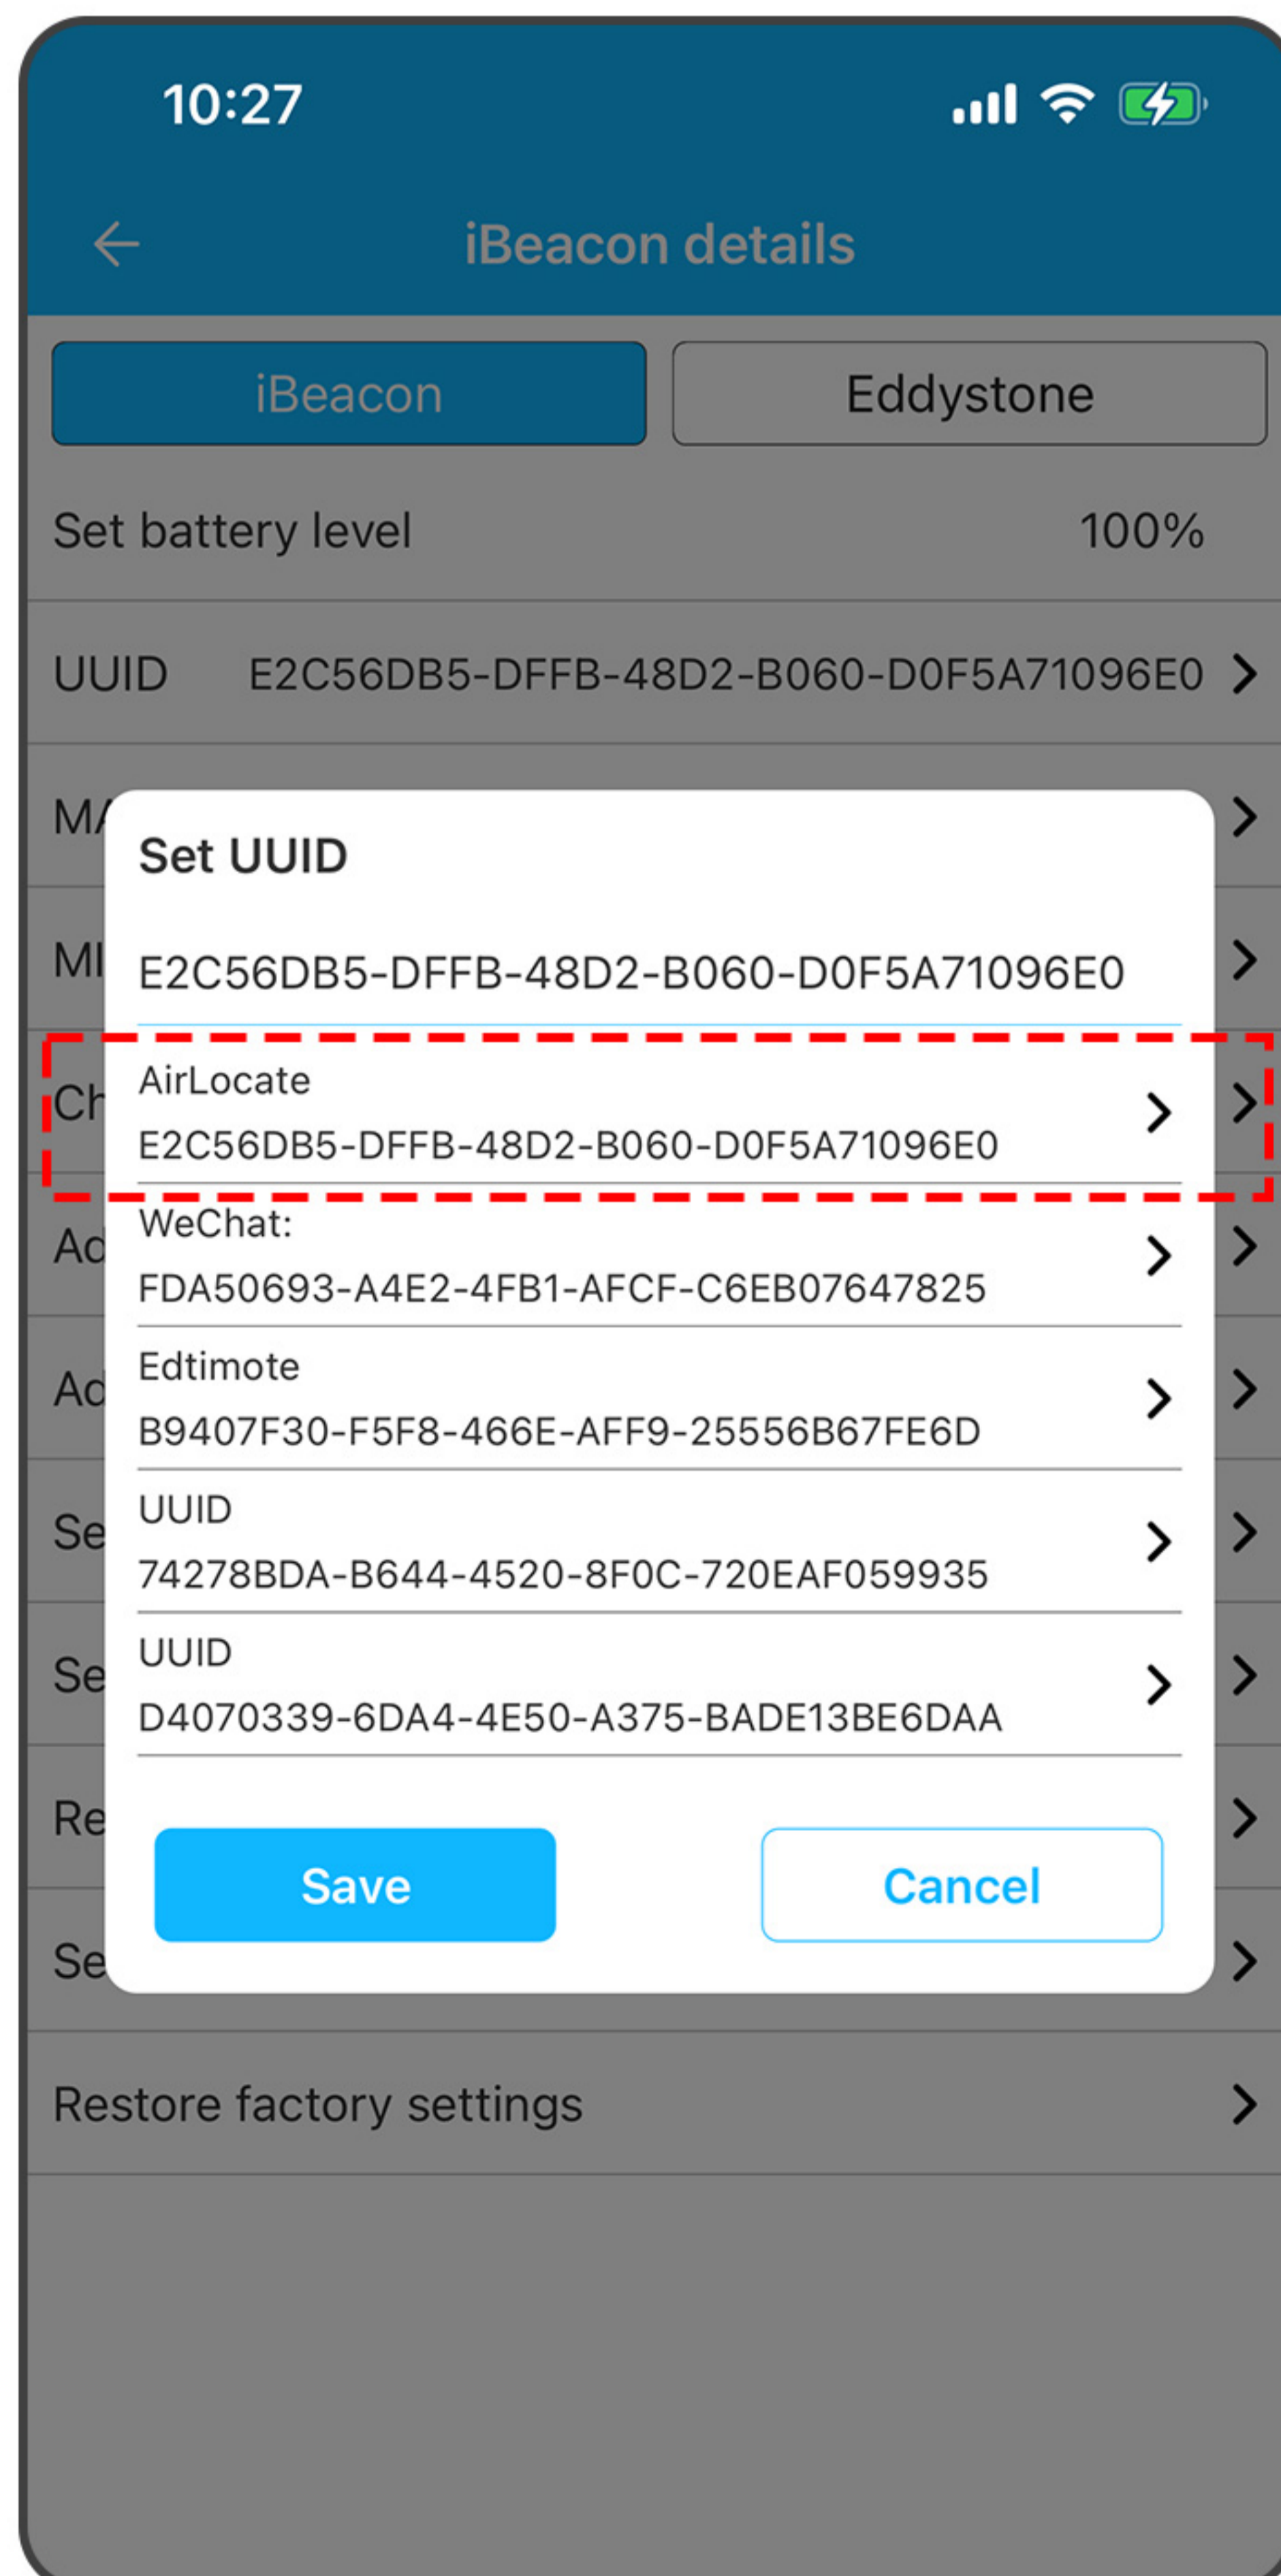
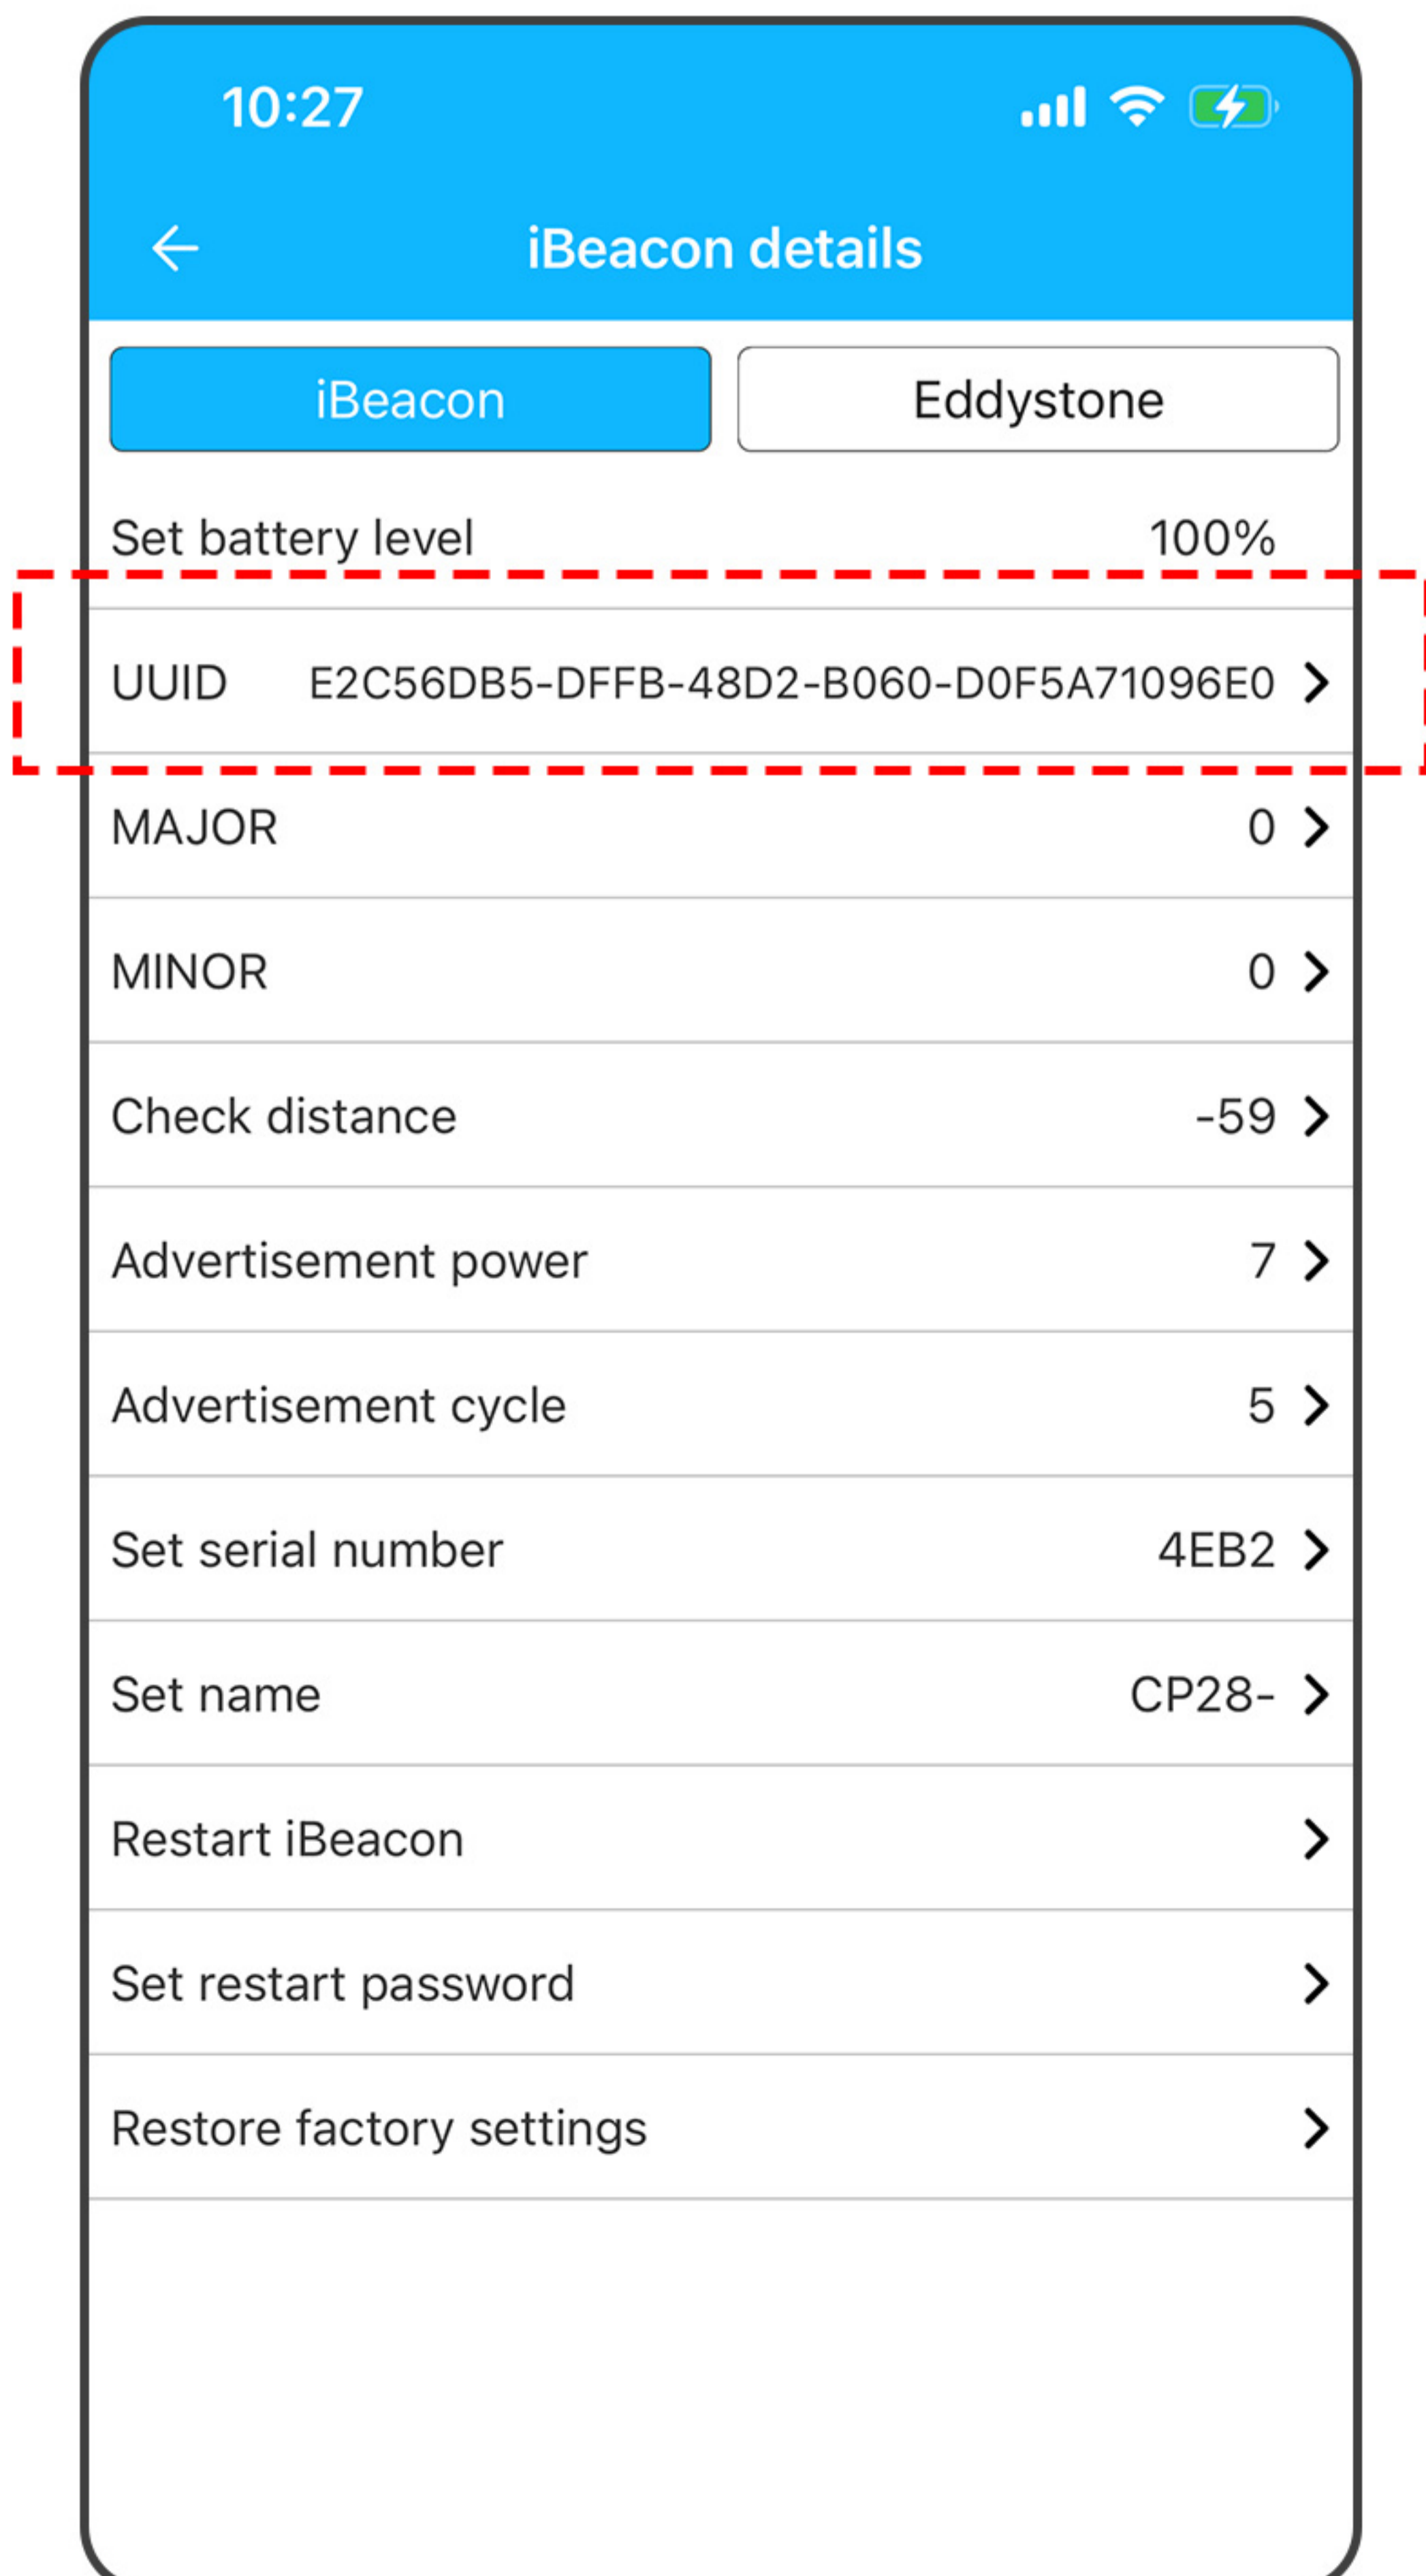


Set MAJOR code, customize the value and save, save successfully Beacon will blink red light.

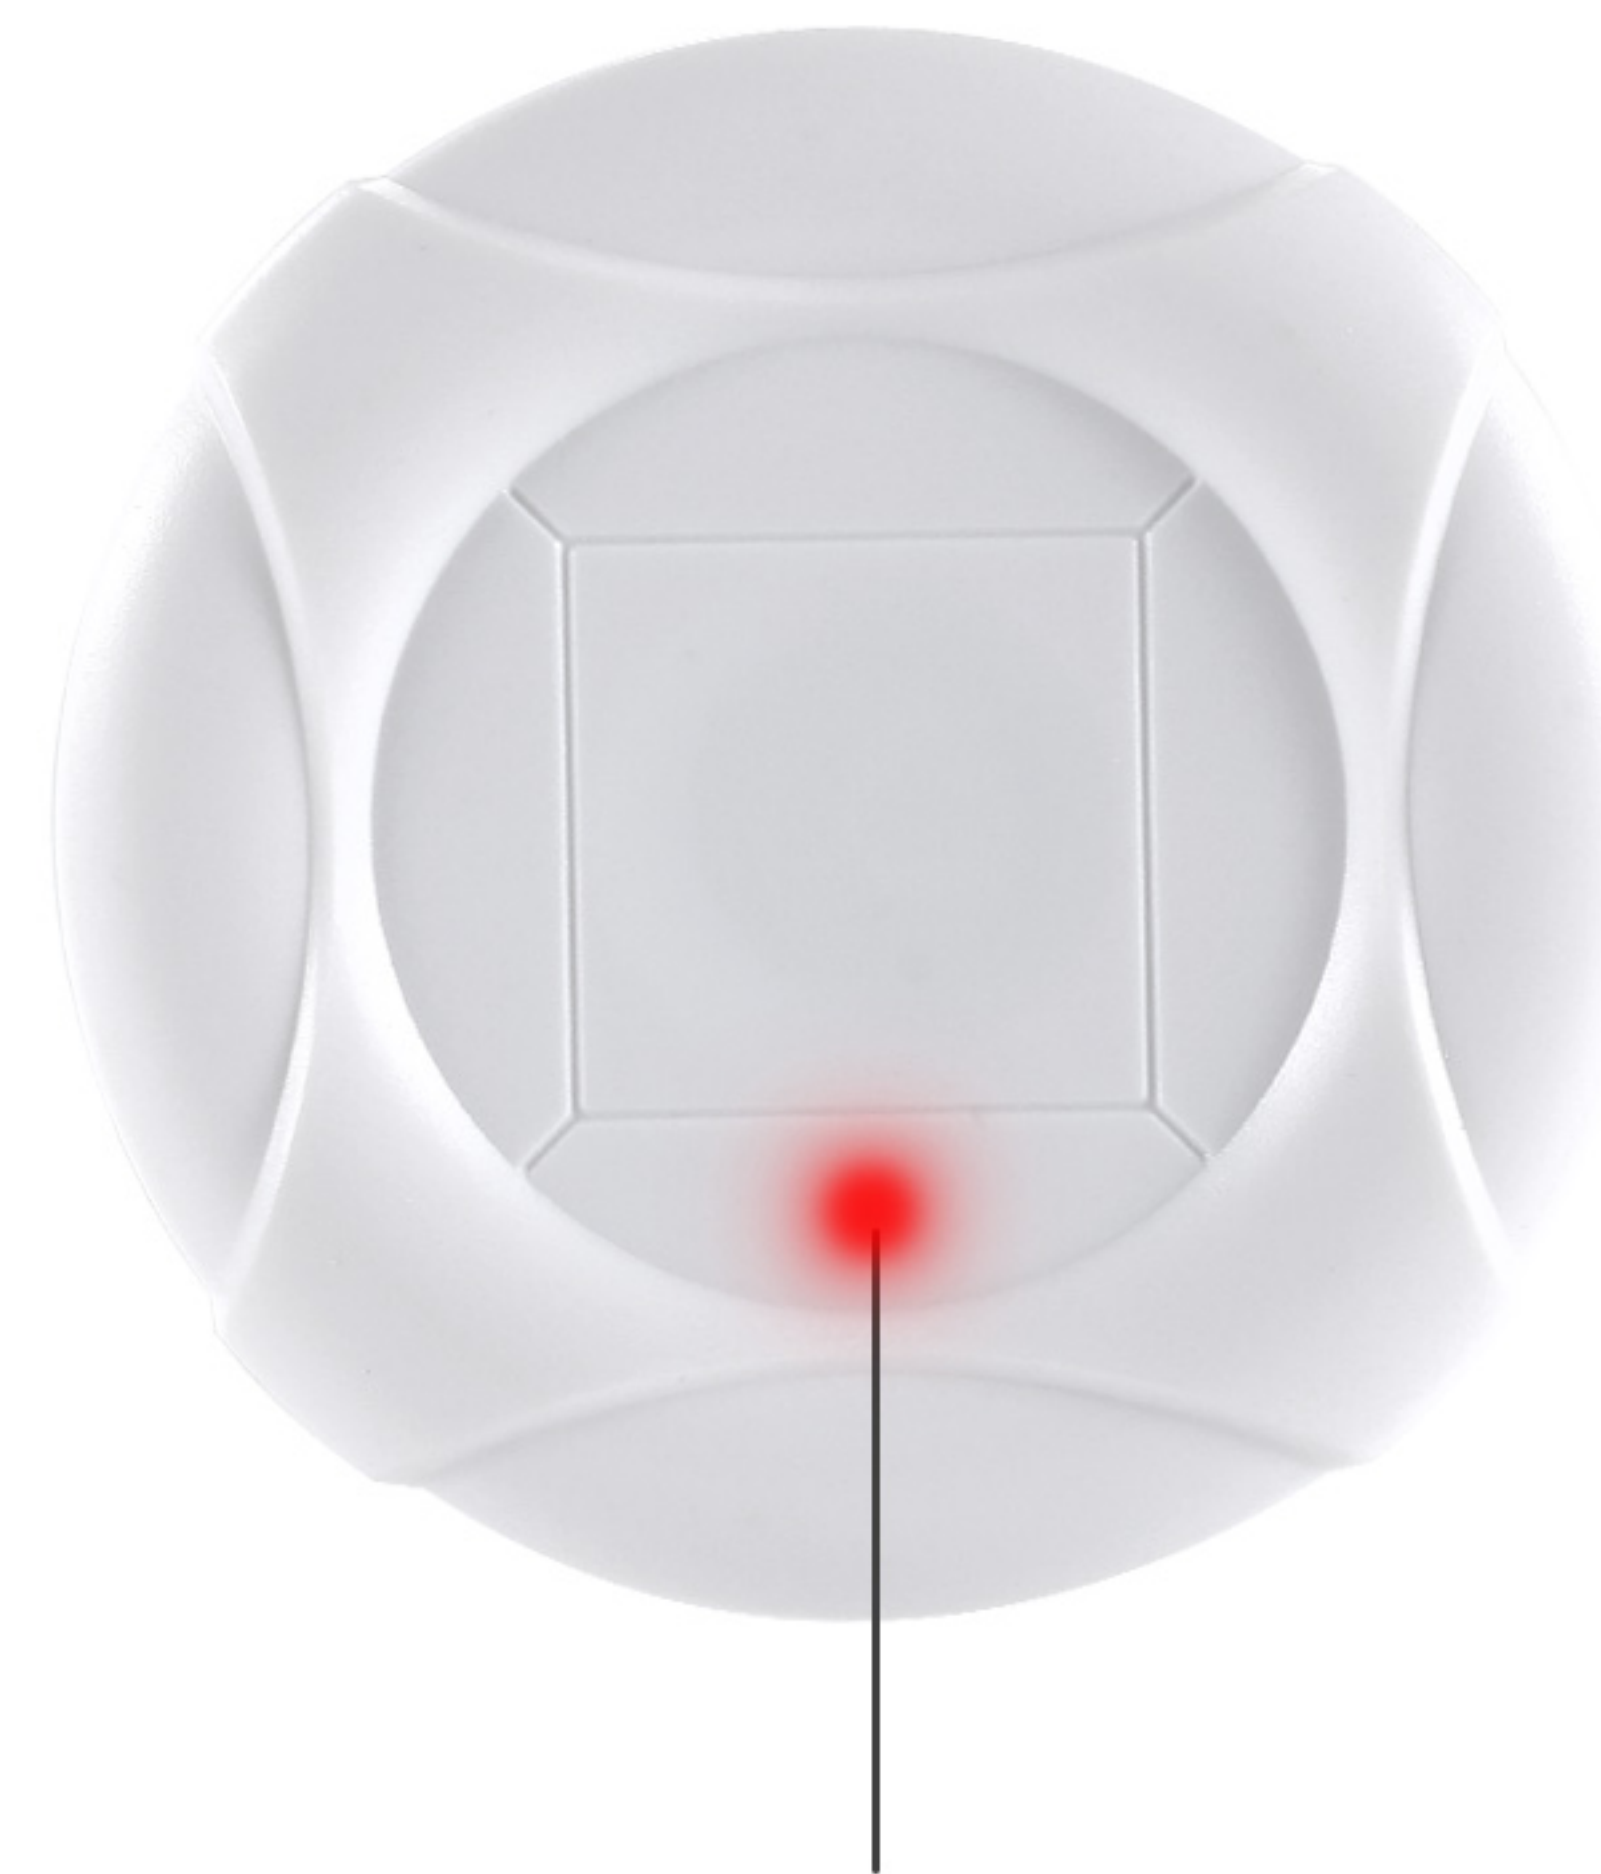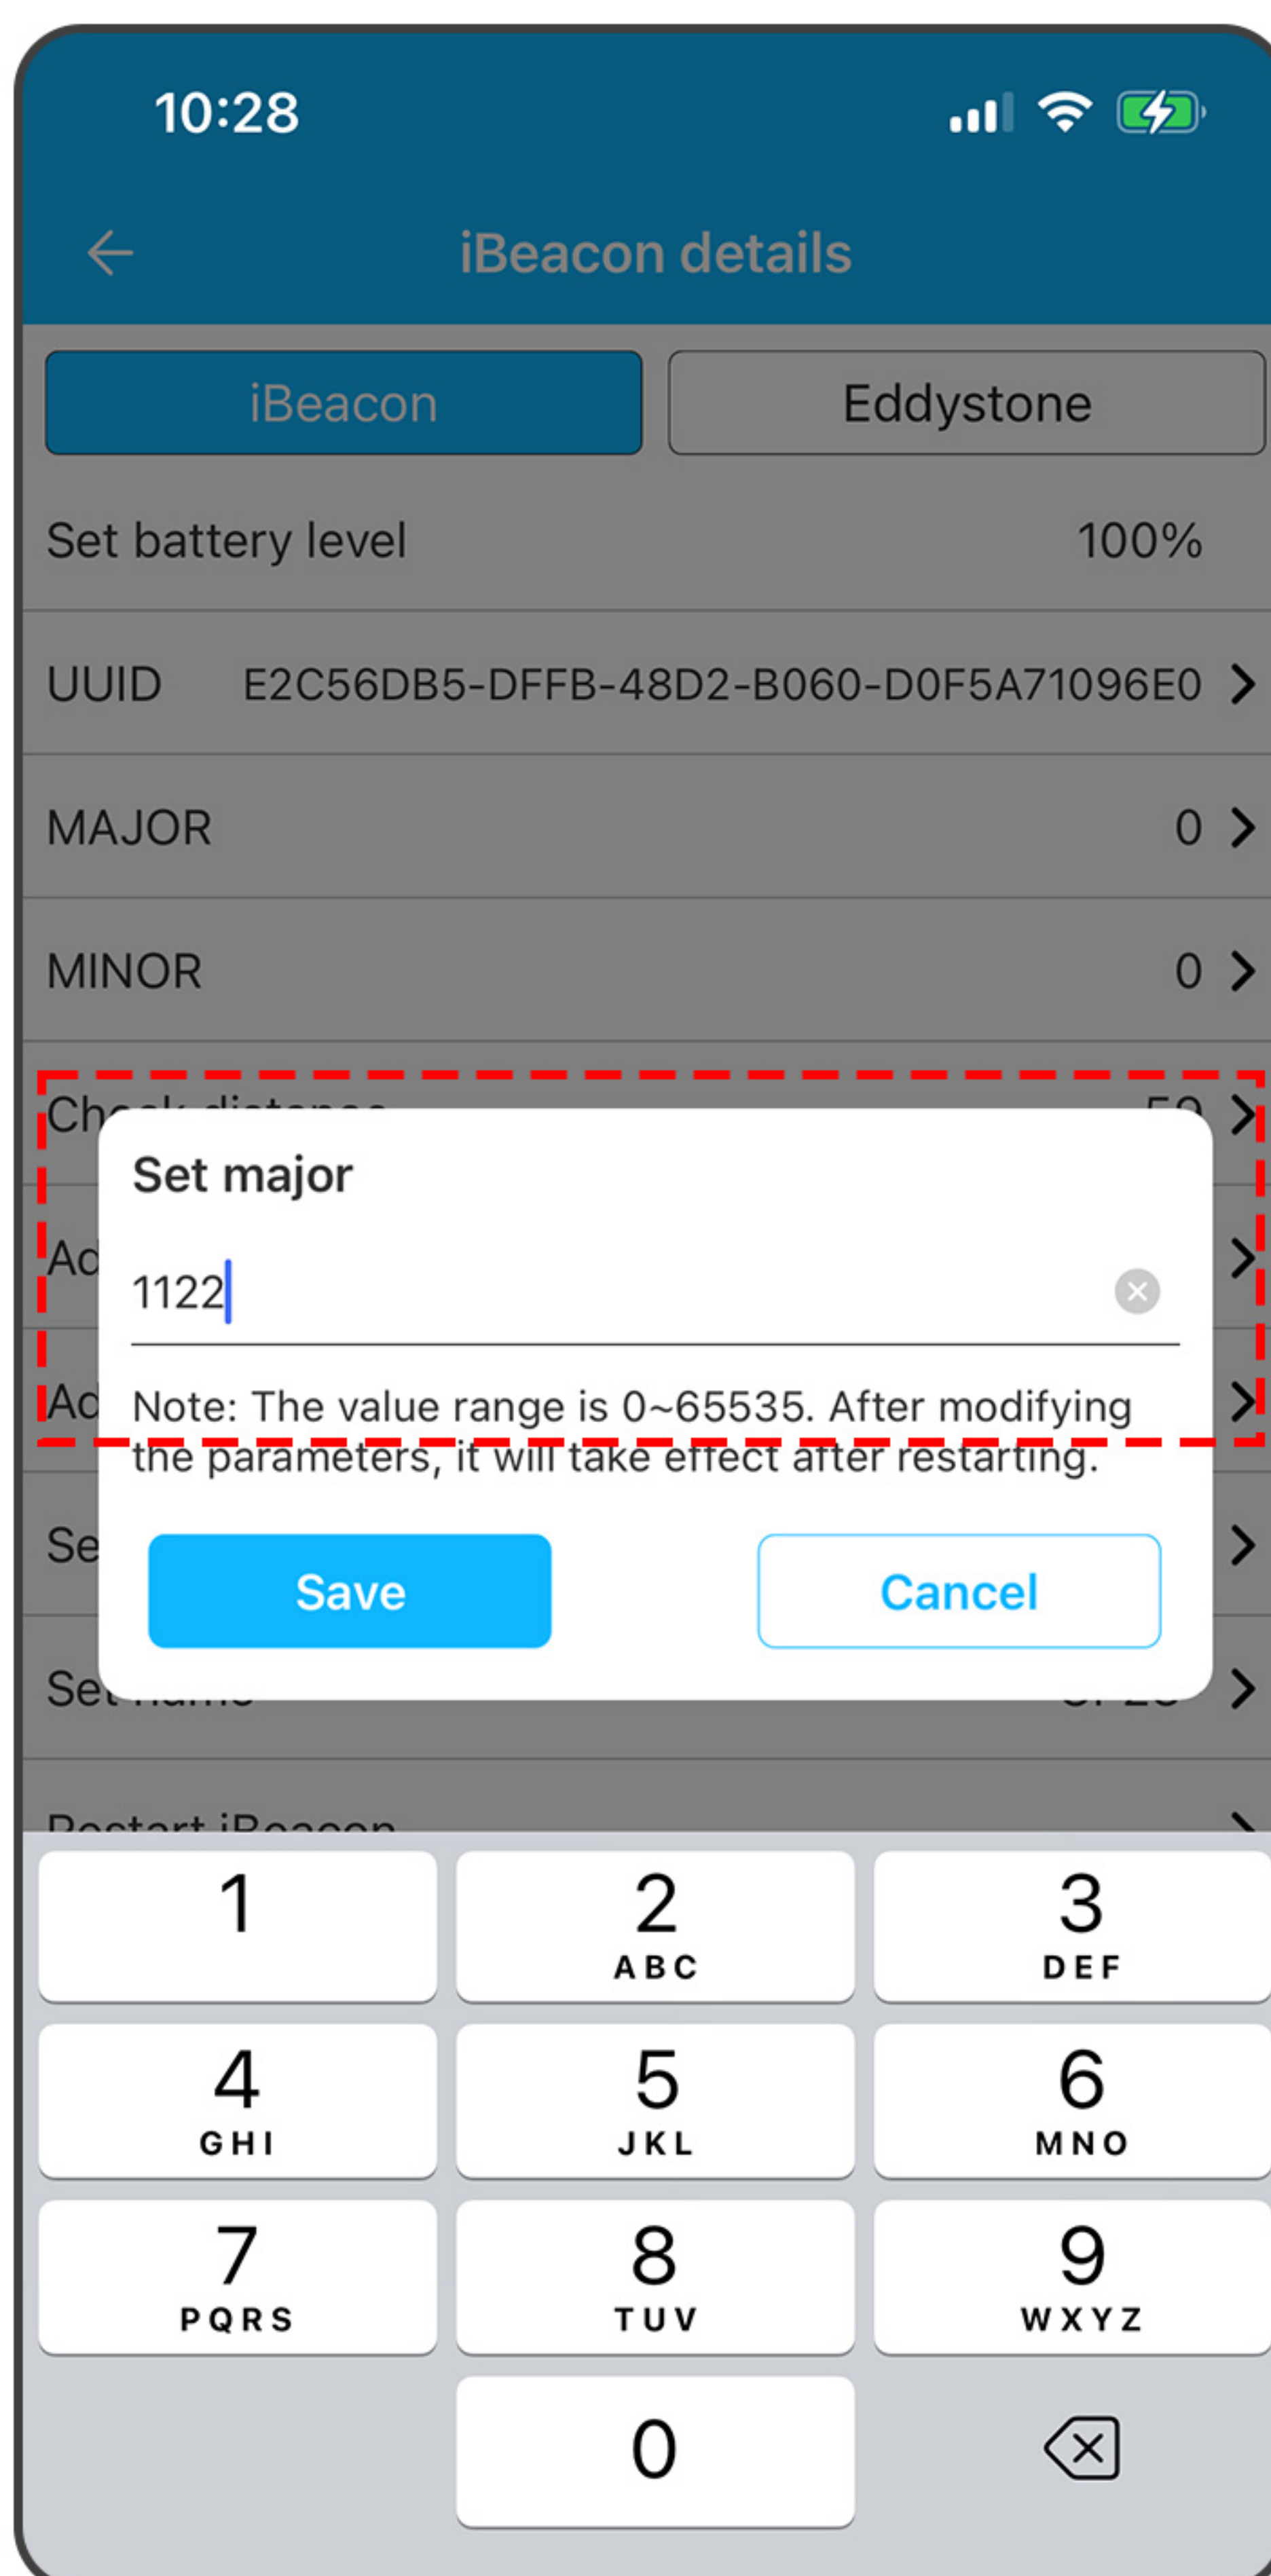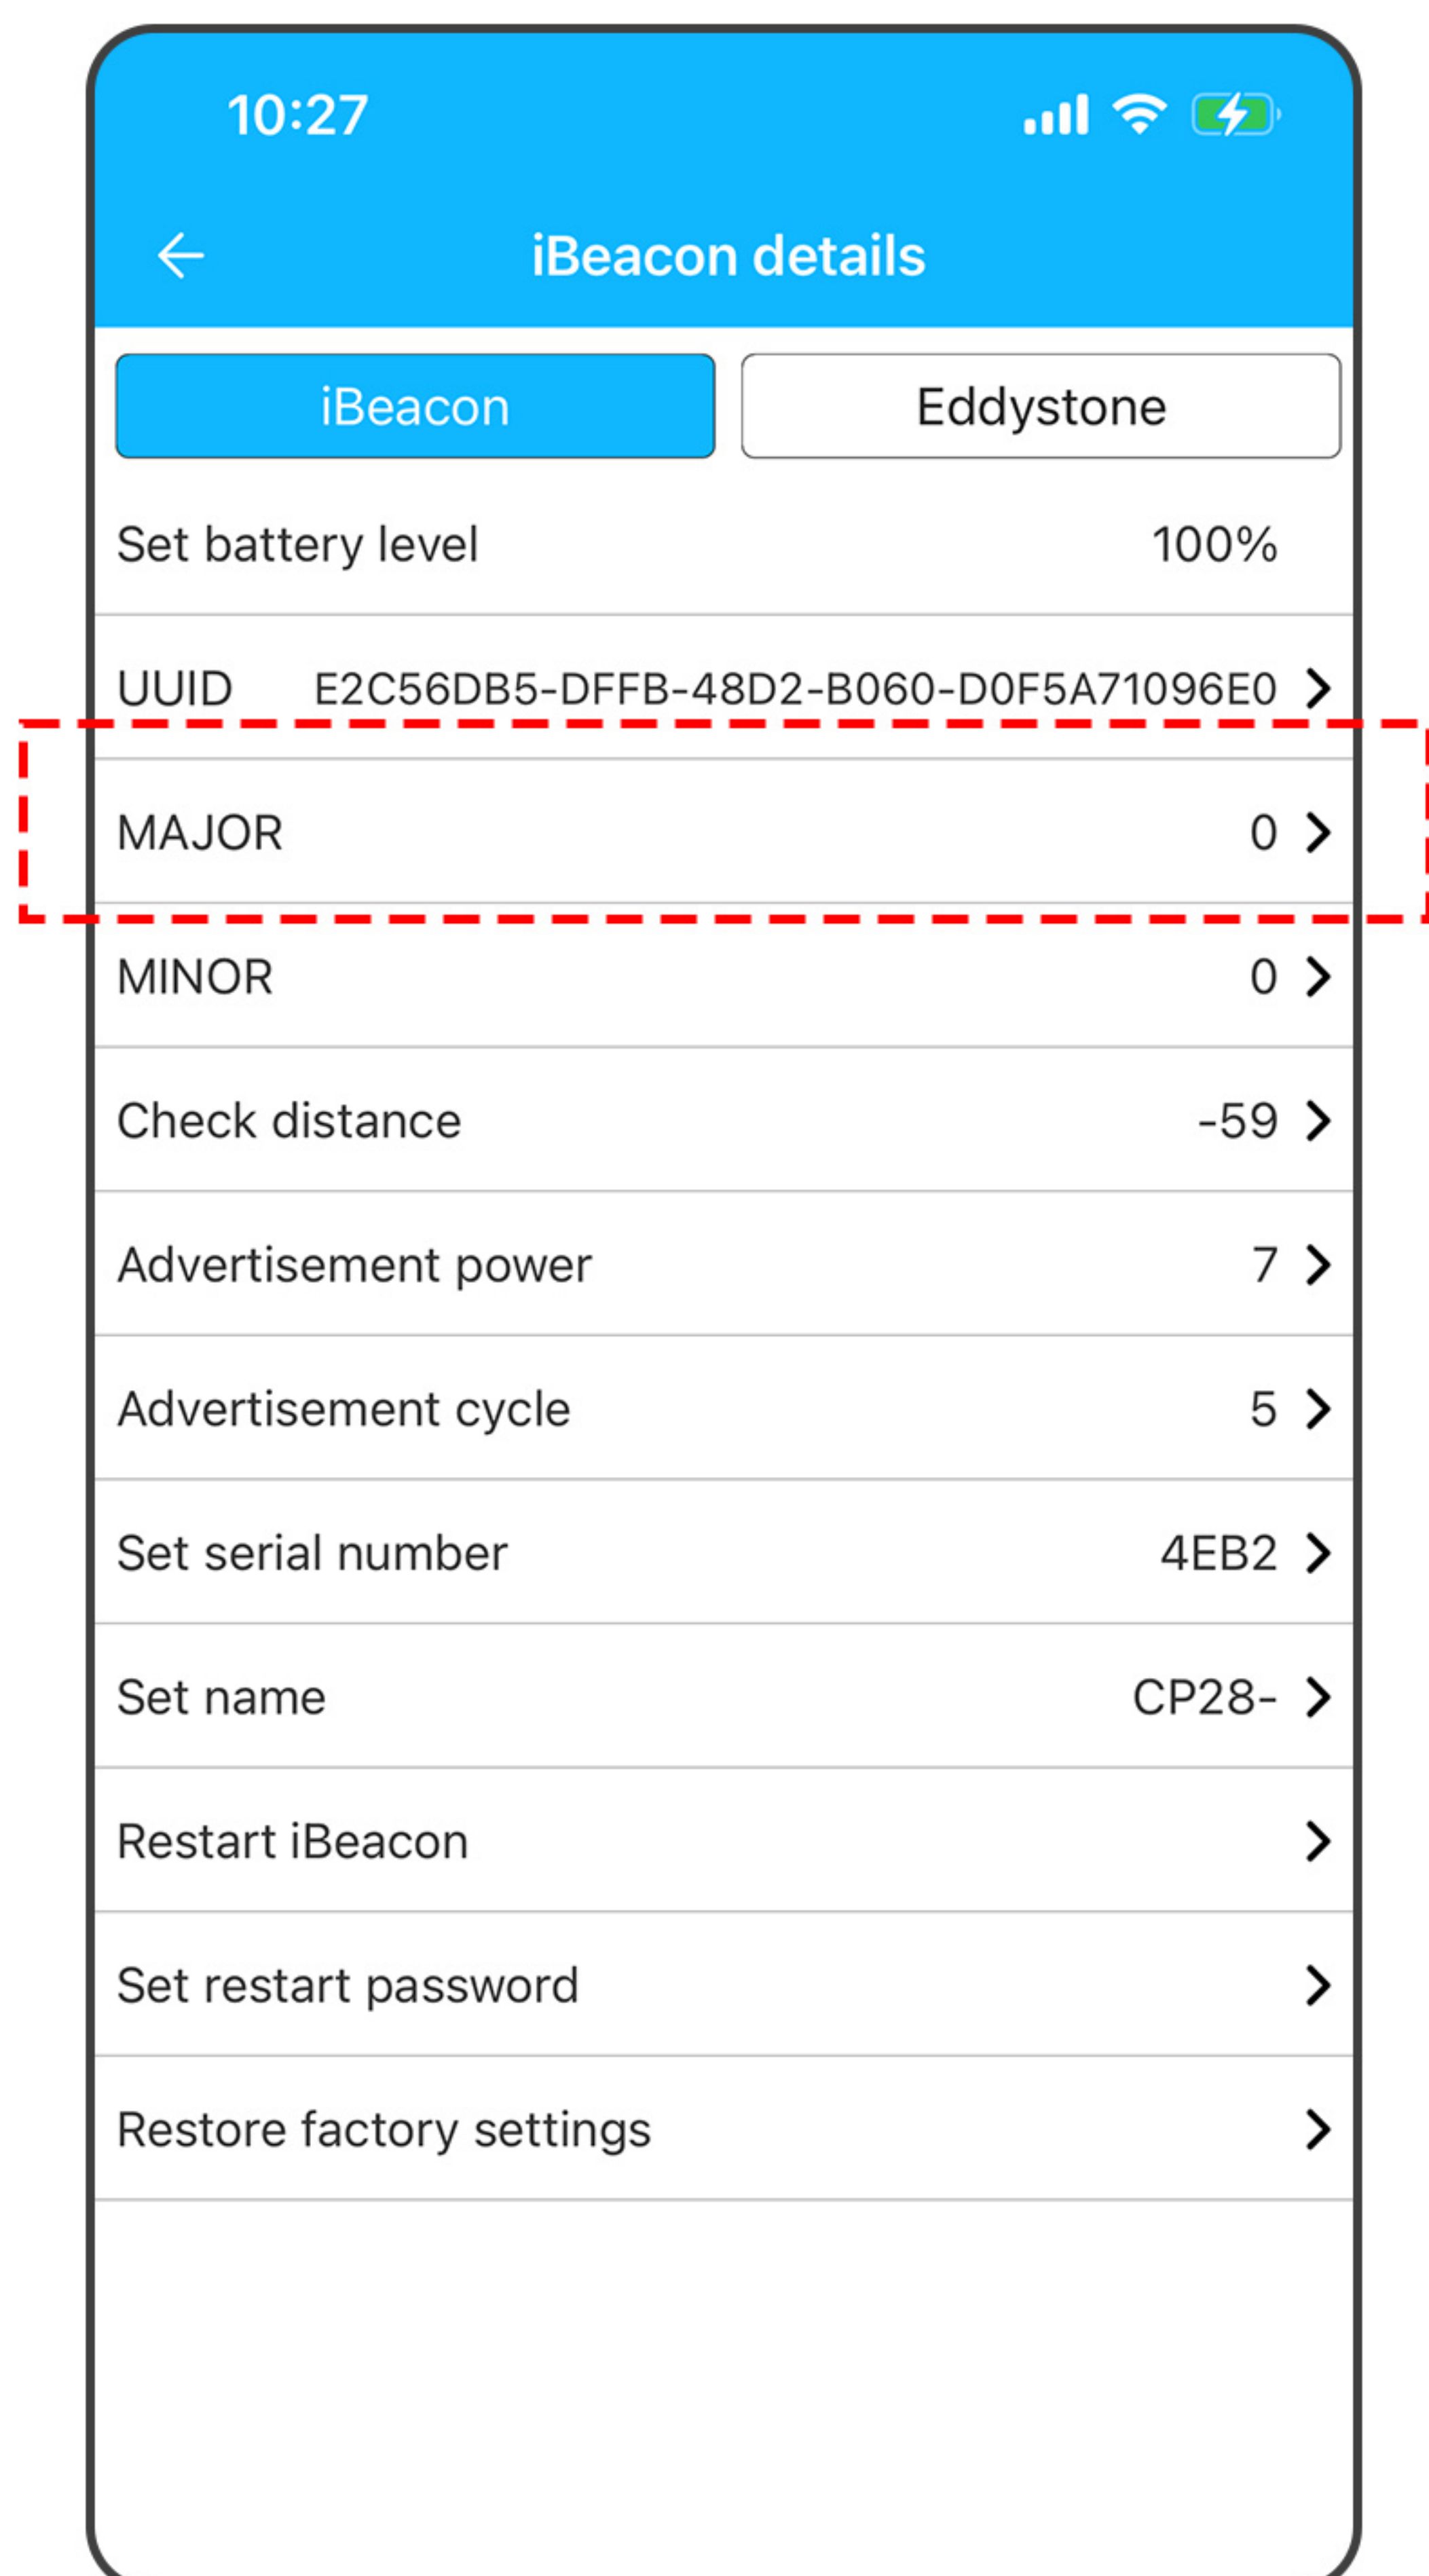




Blink red light

Set MINOR code, customize the value and save, save successfully Beacon will blink red light.

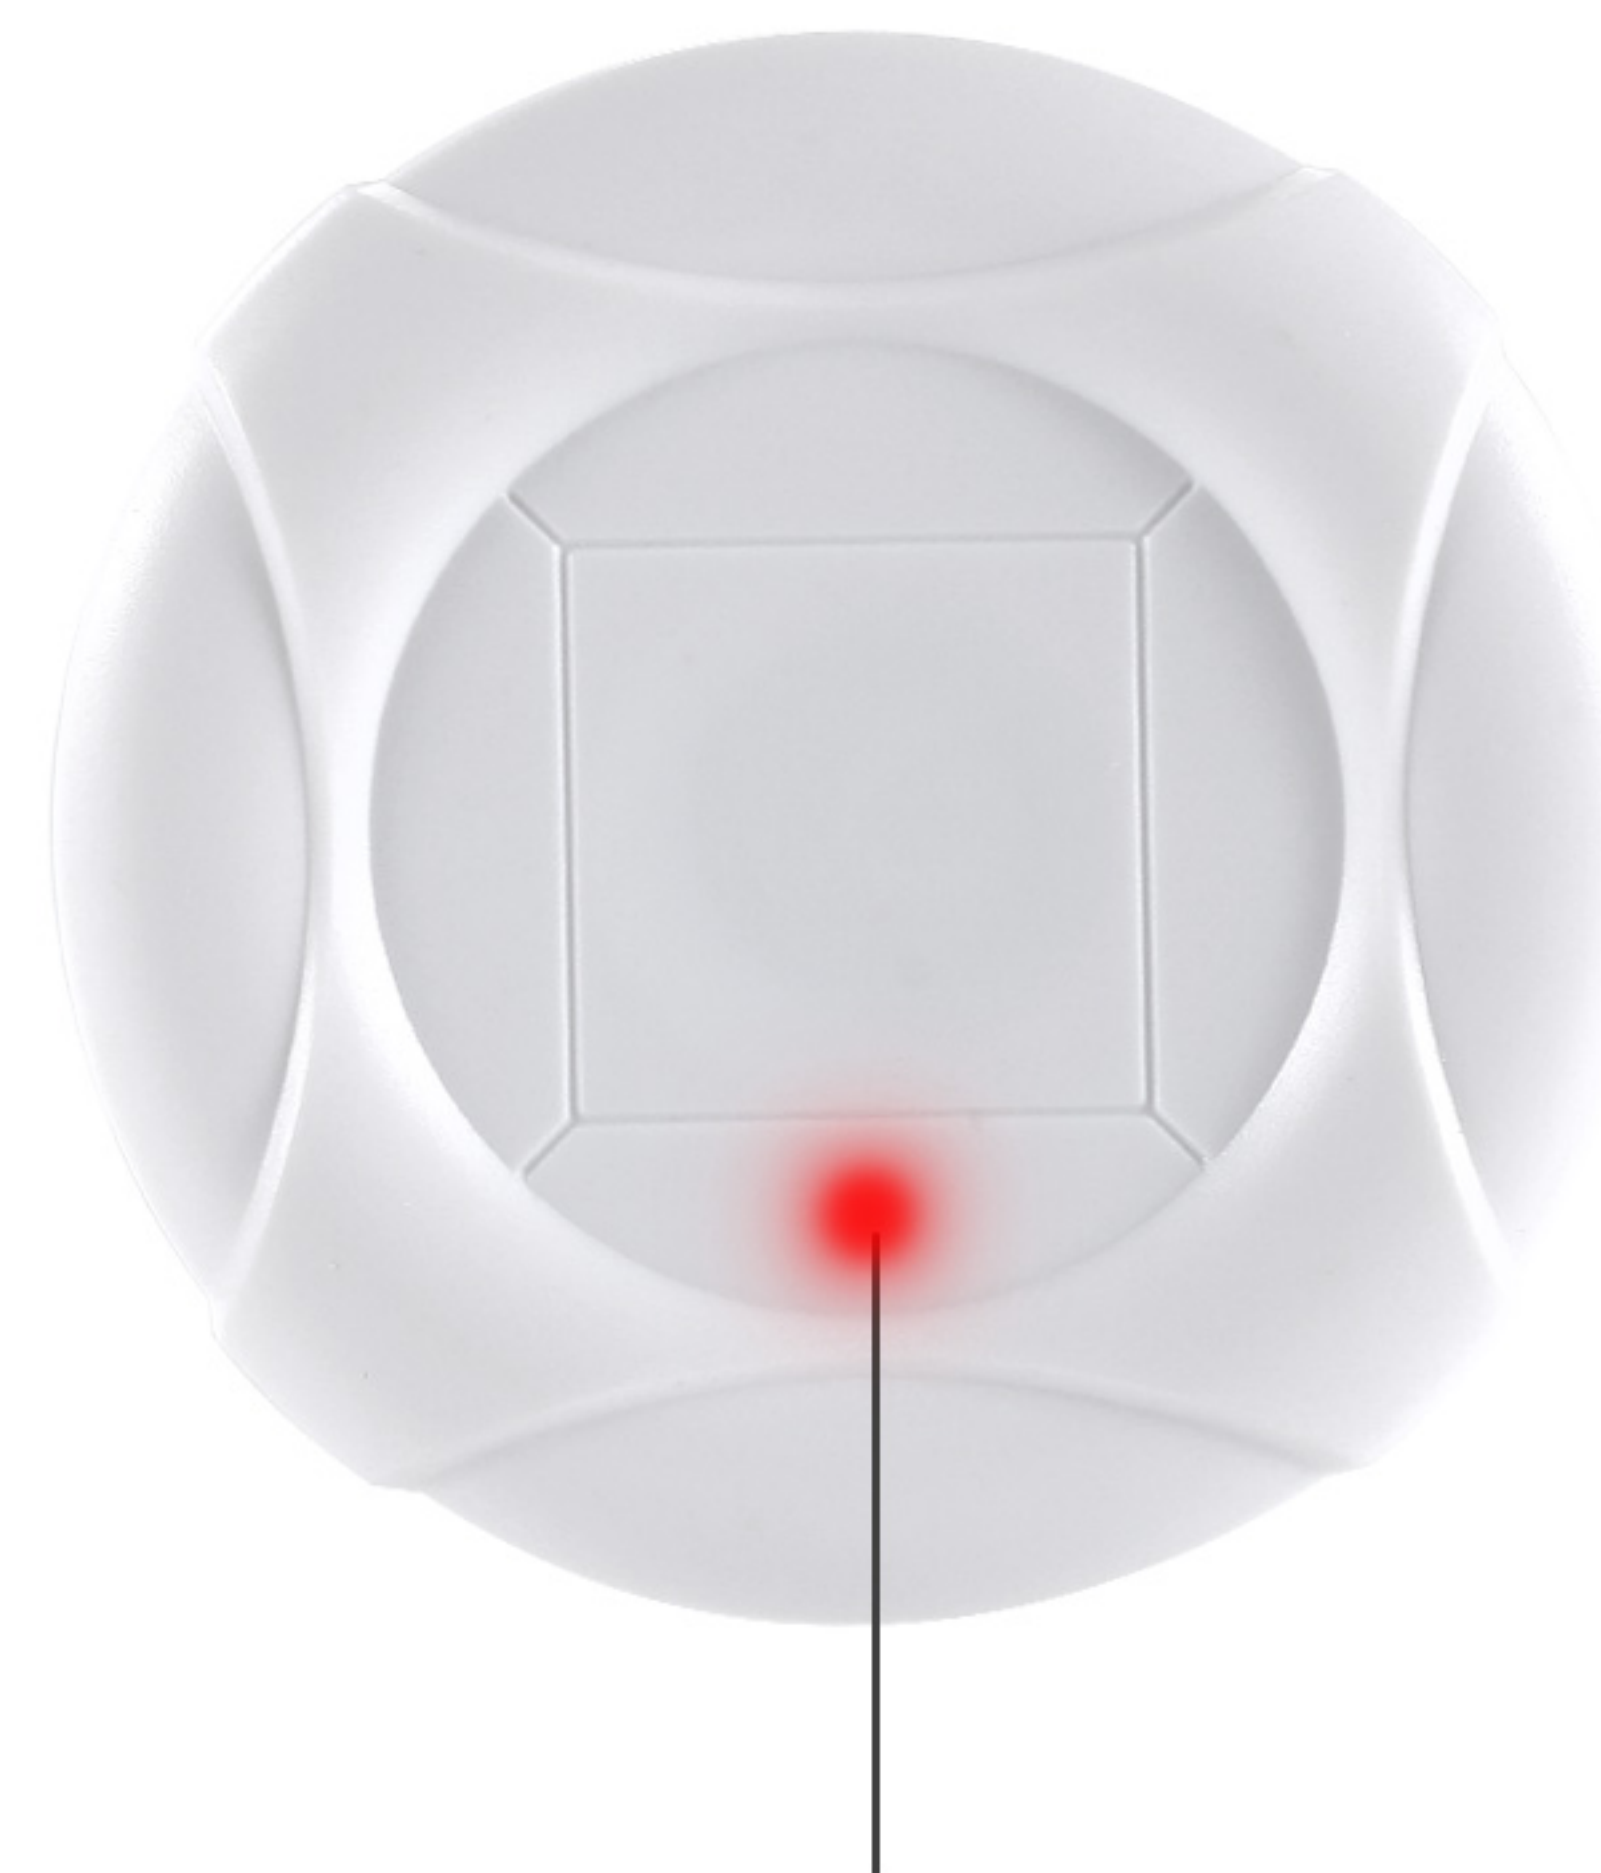
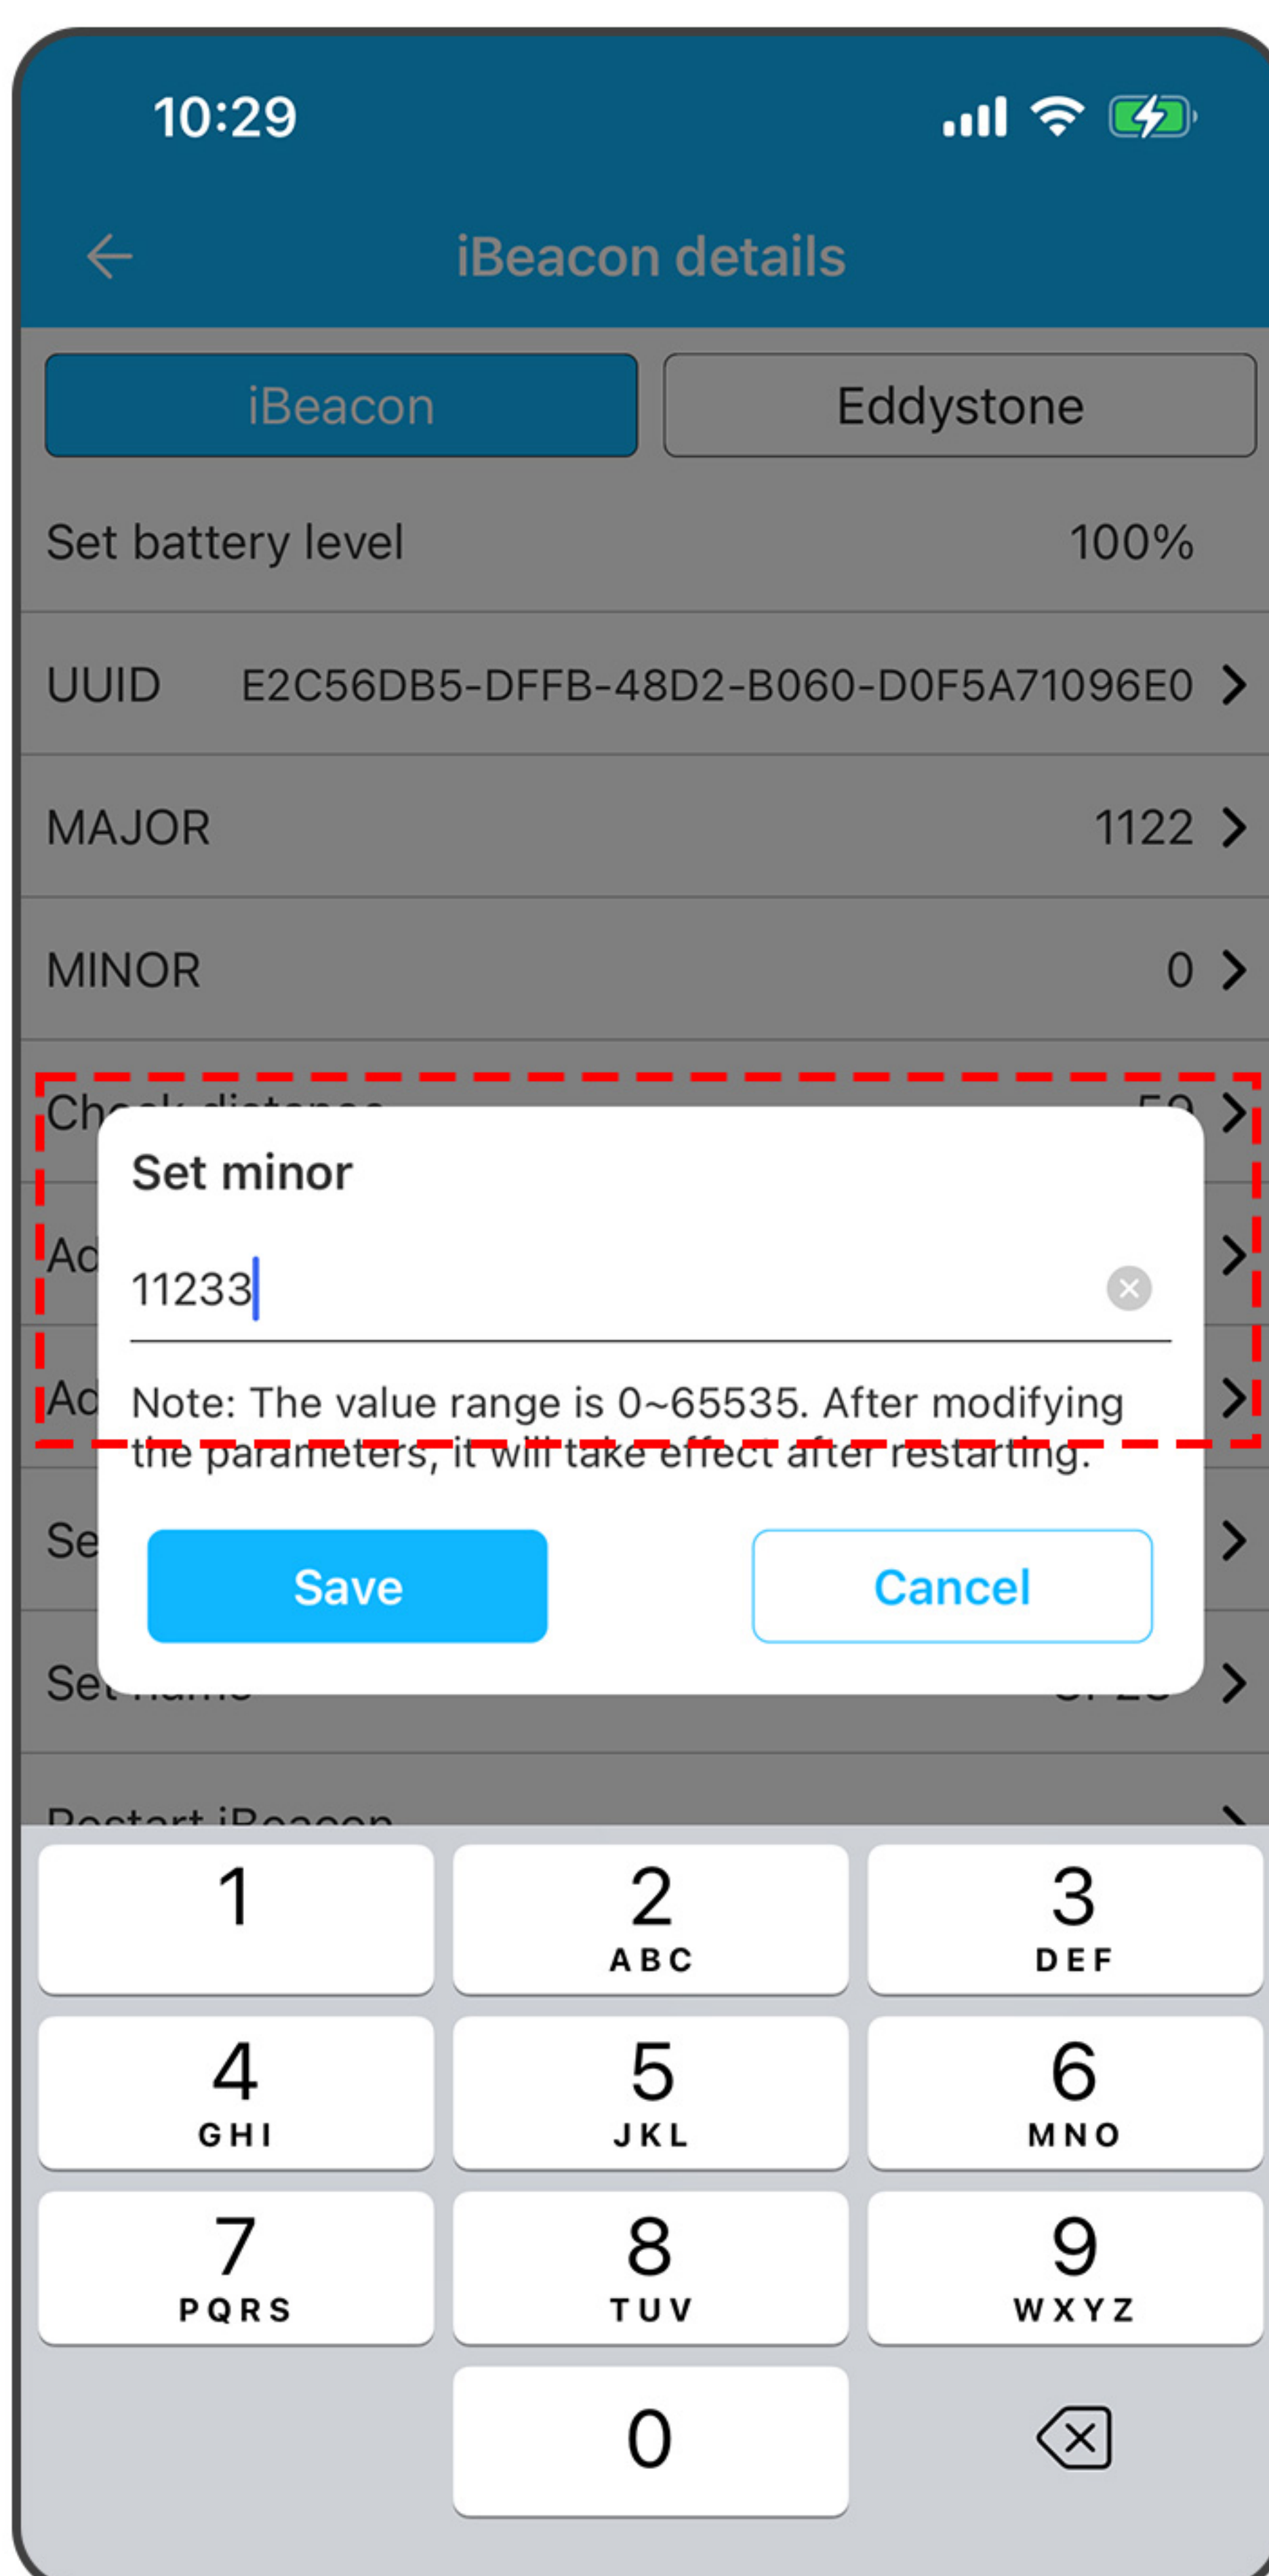
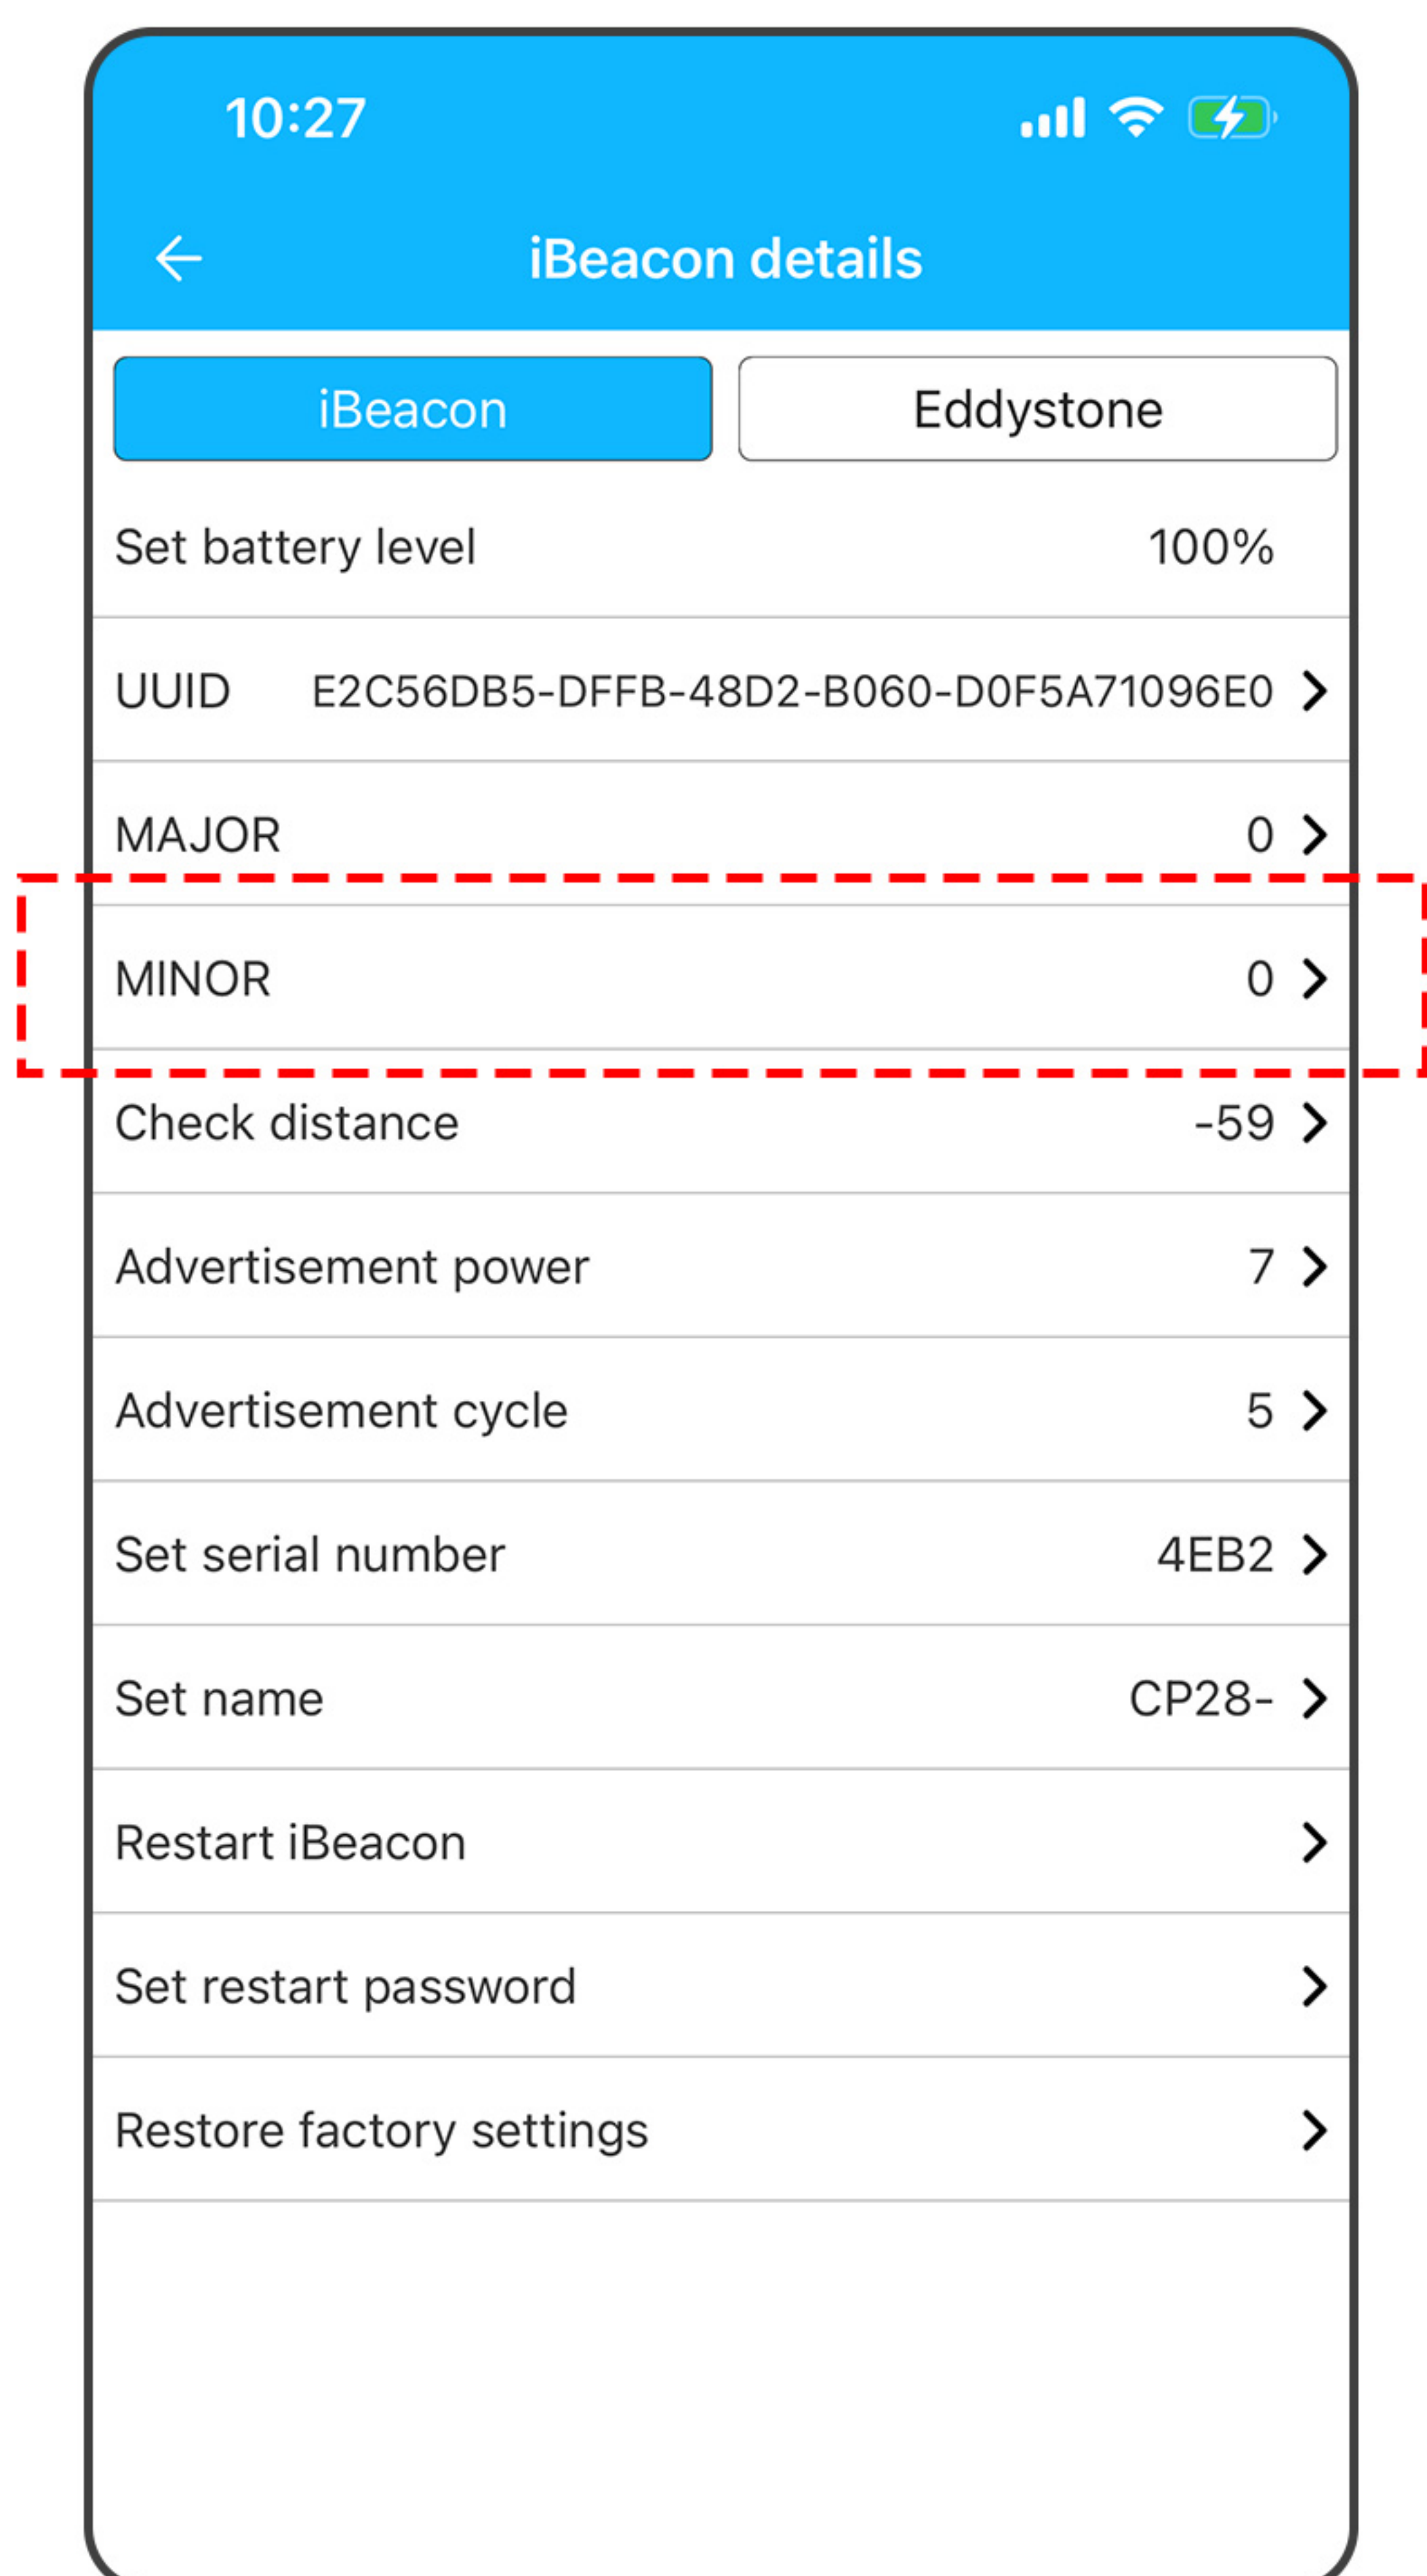


Blink red light

Customize the broadcast distance and save it, Beacon will blink red light if saved successfully.

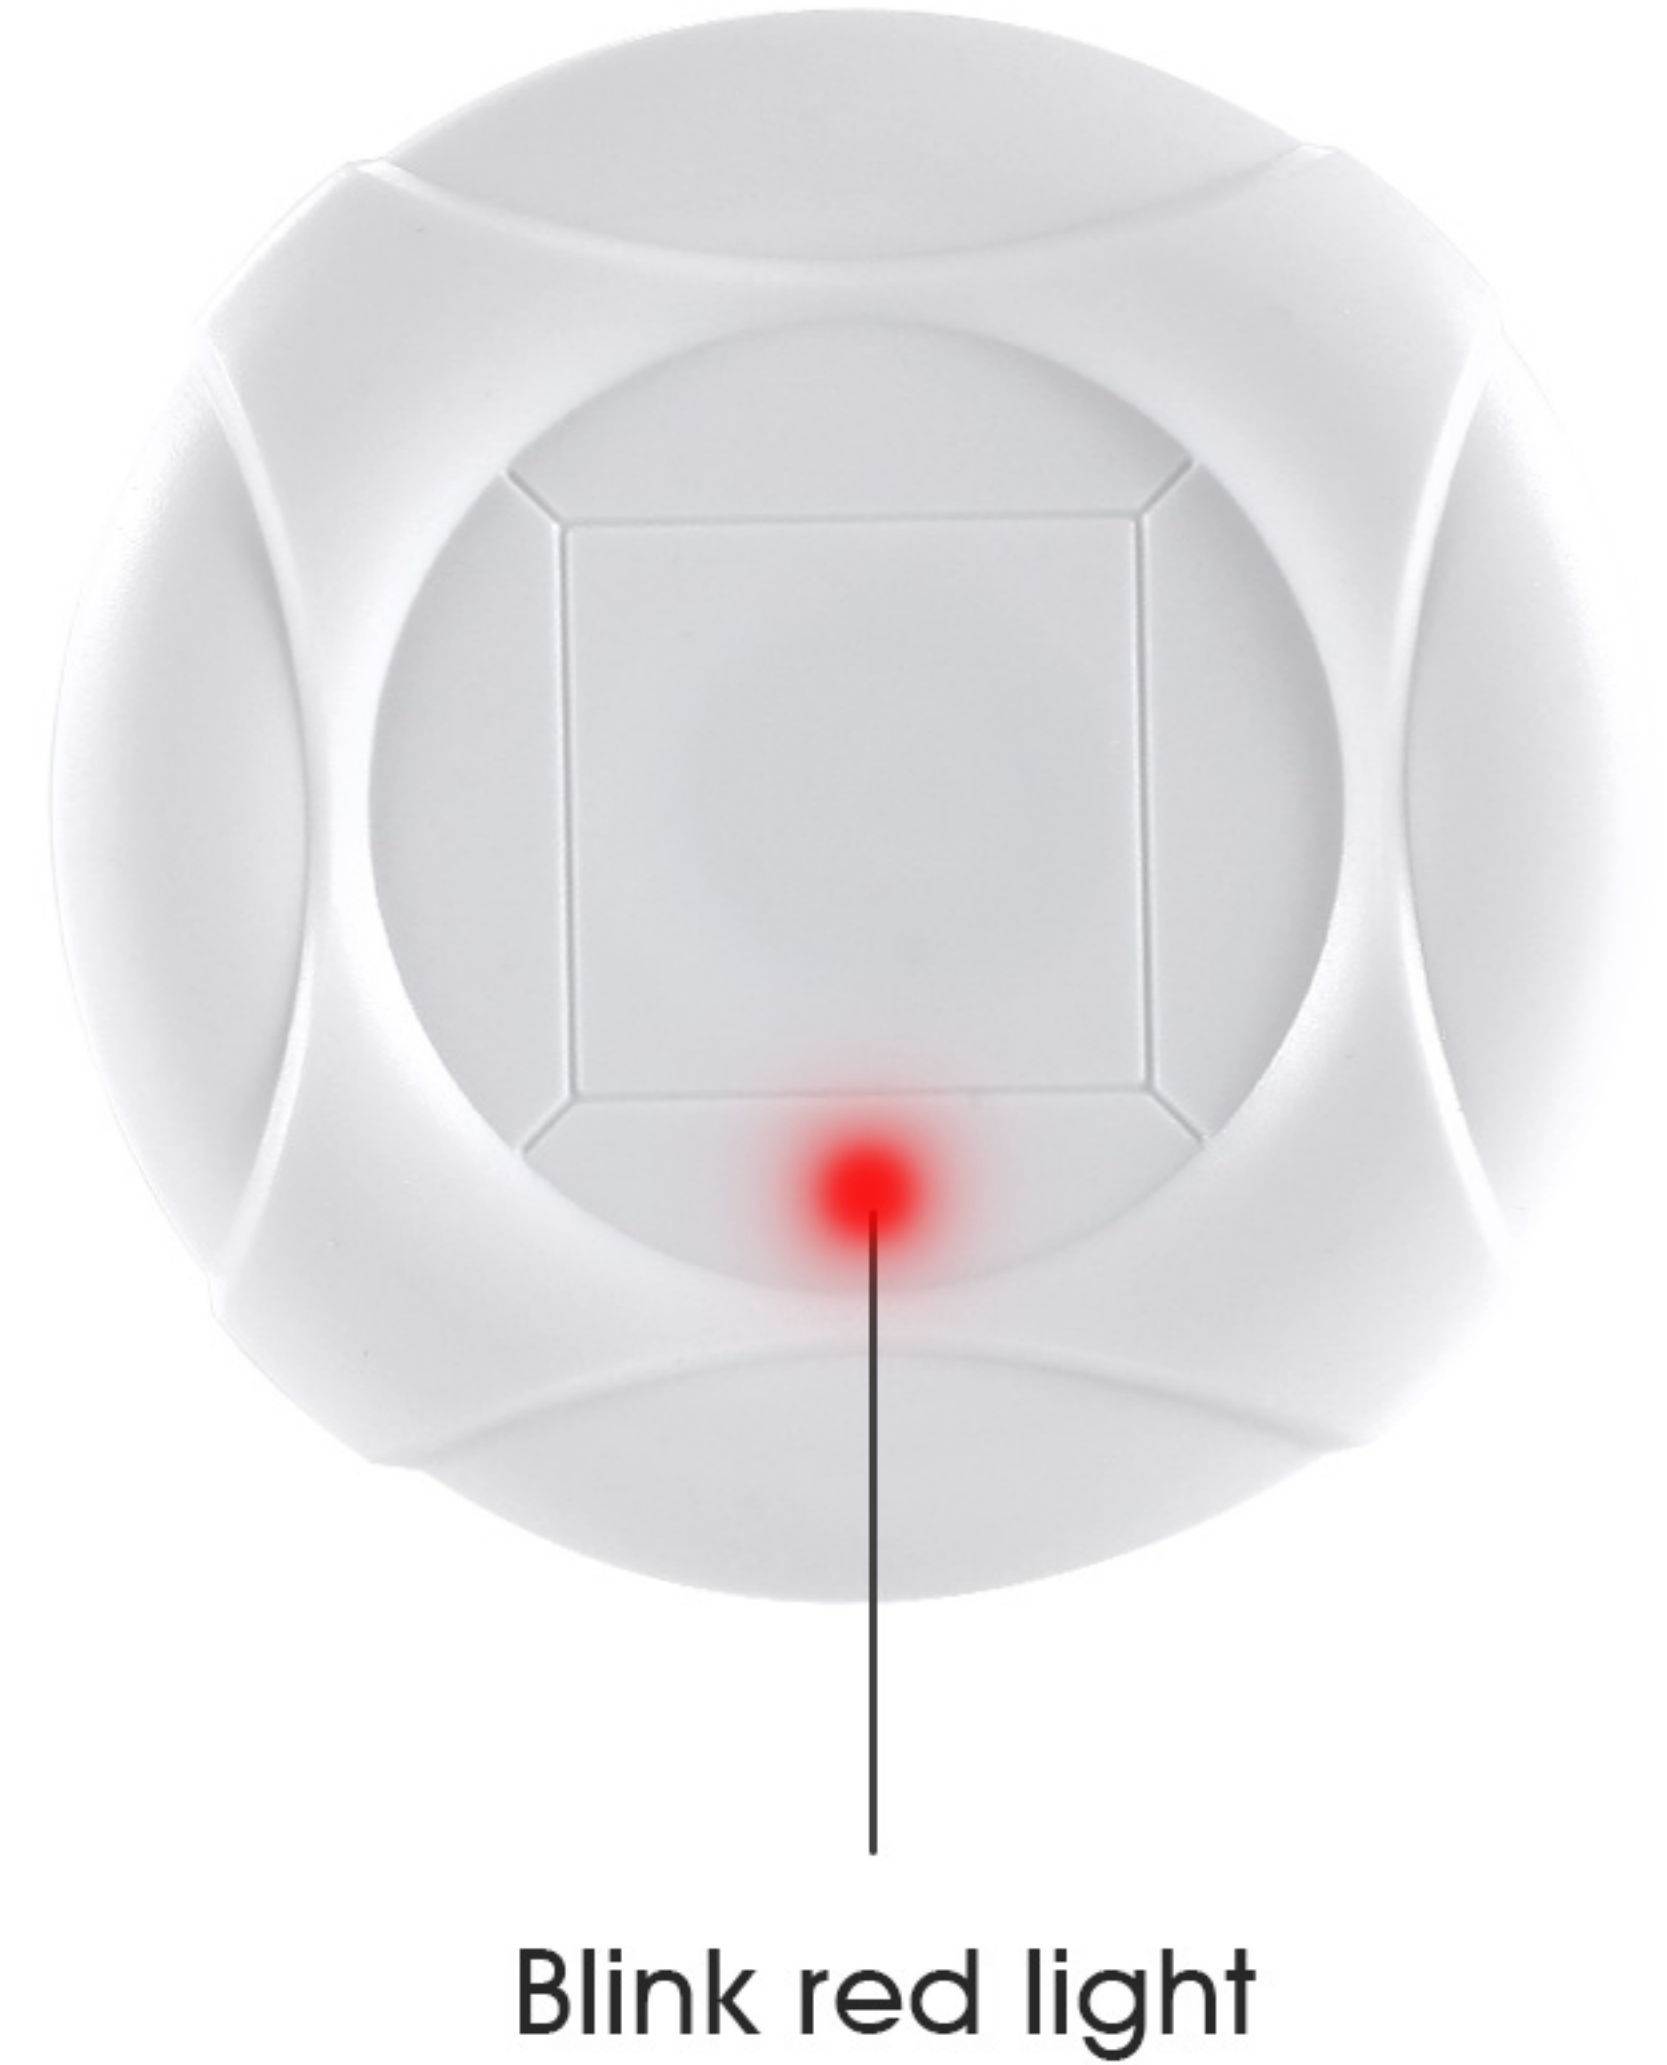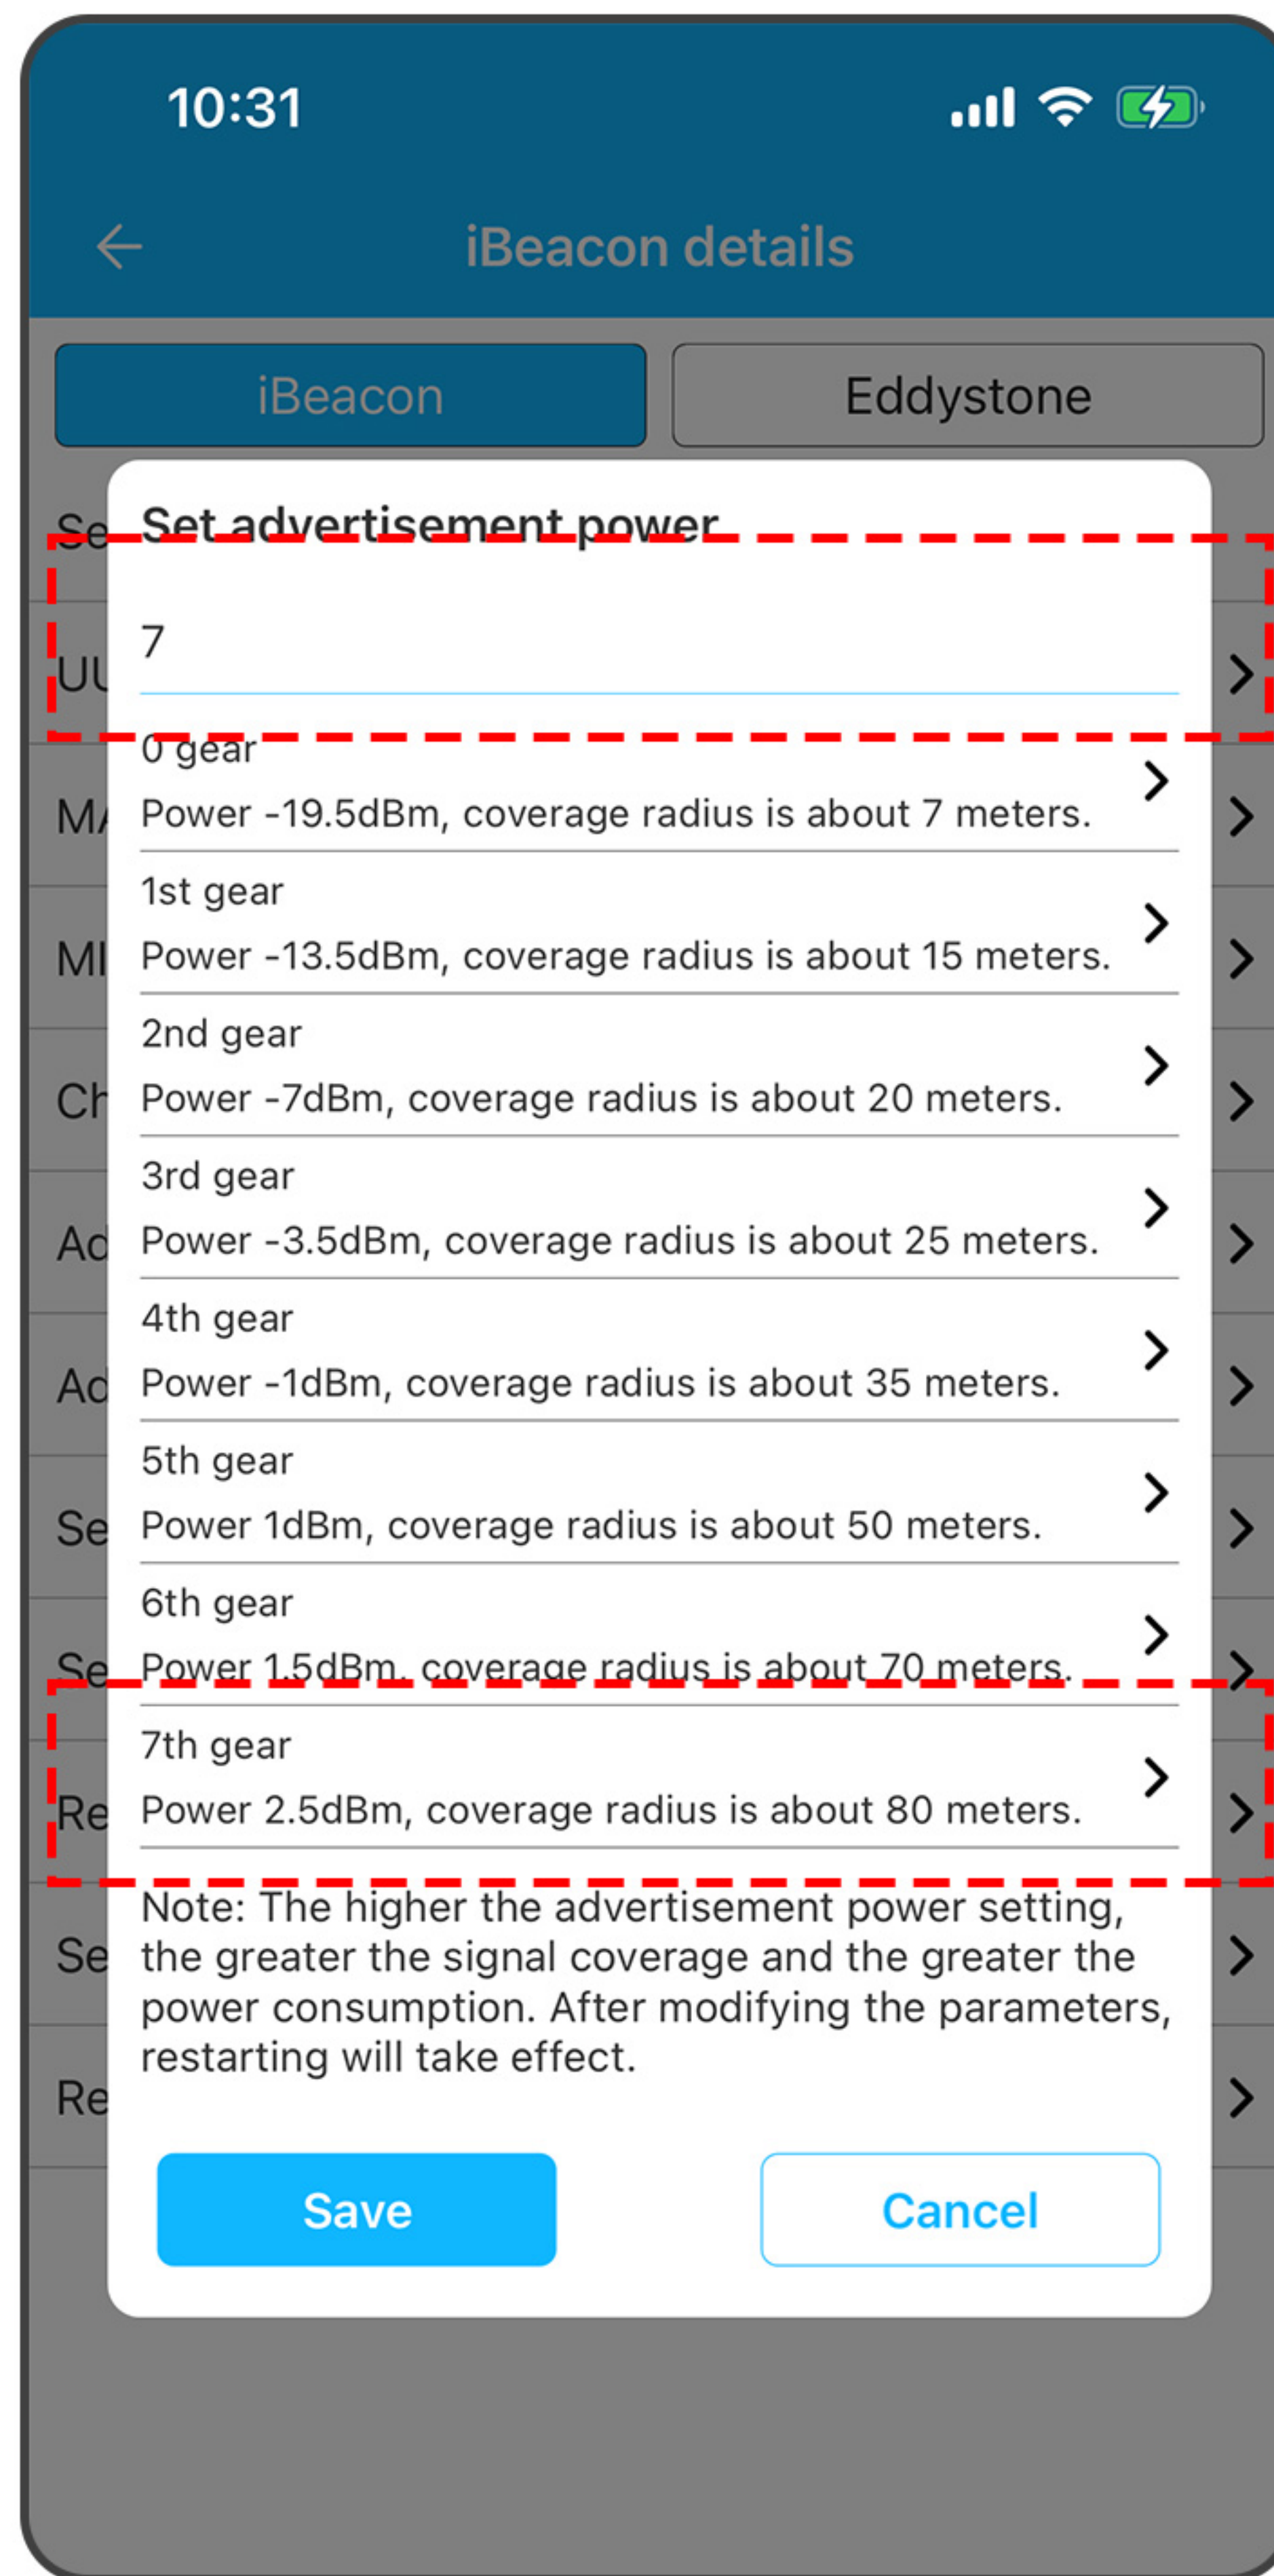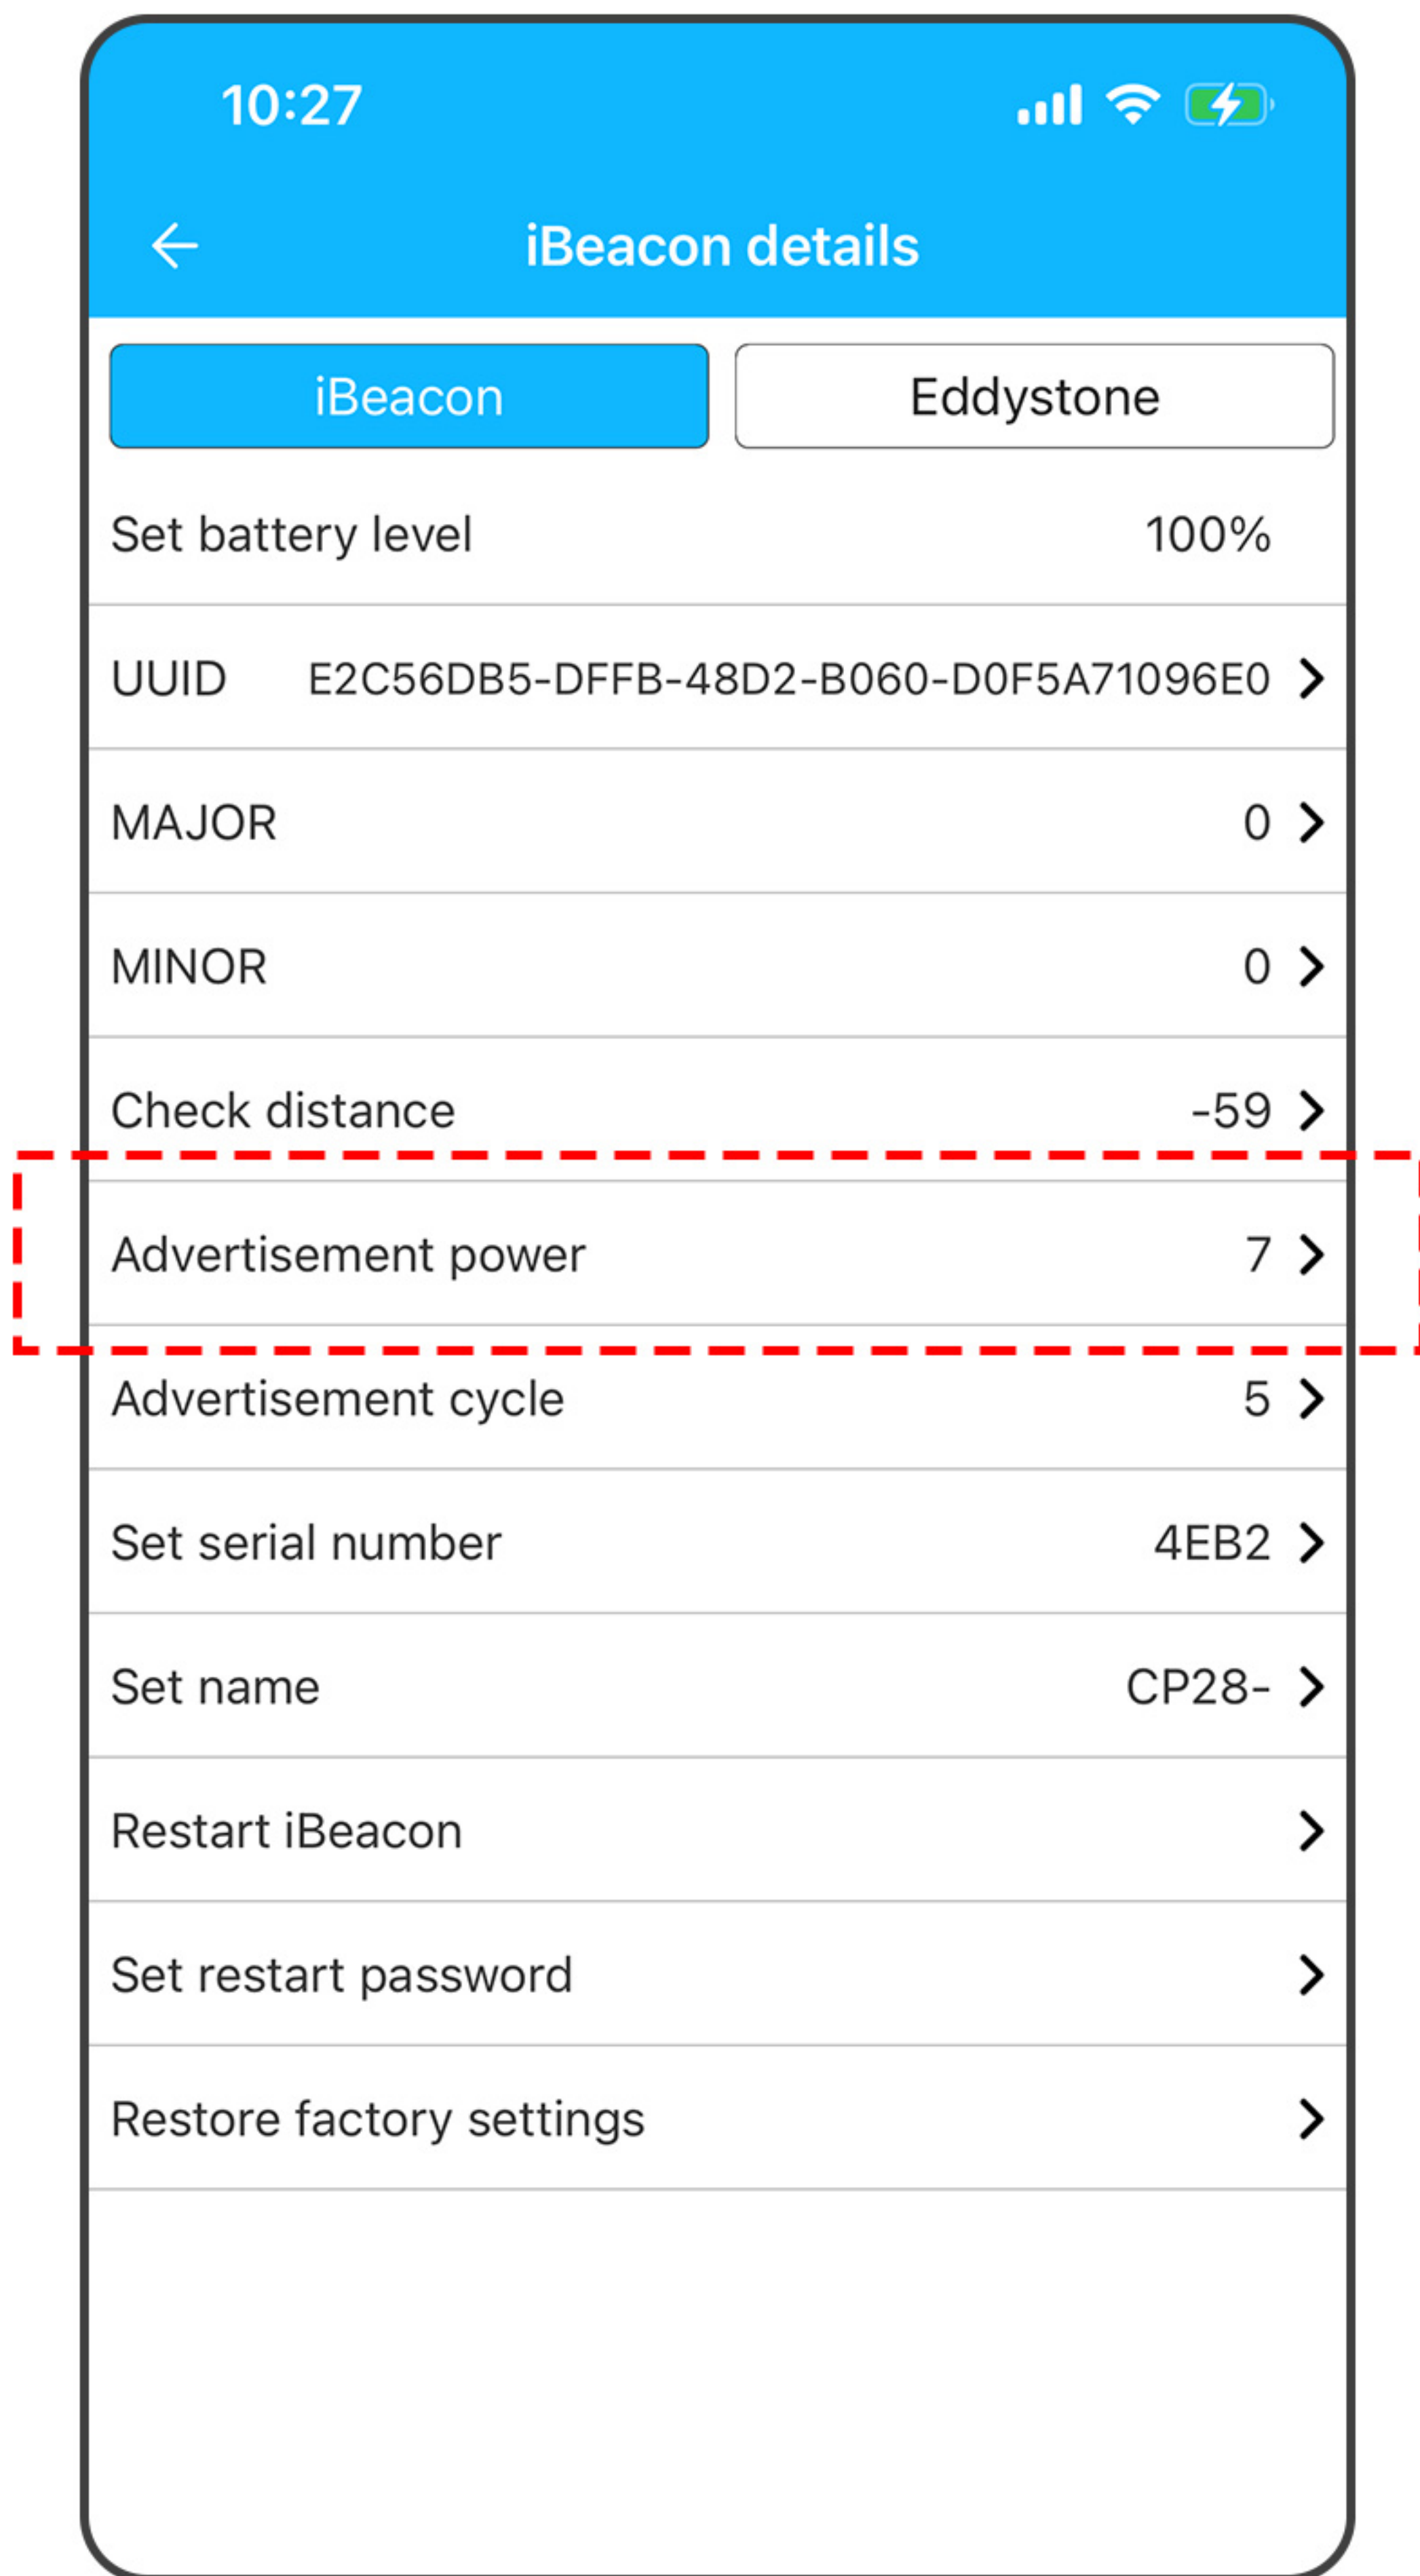

Customize the broadcast push frequency and save it, Beacon will blink red light if saved.

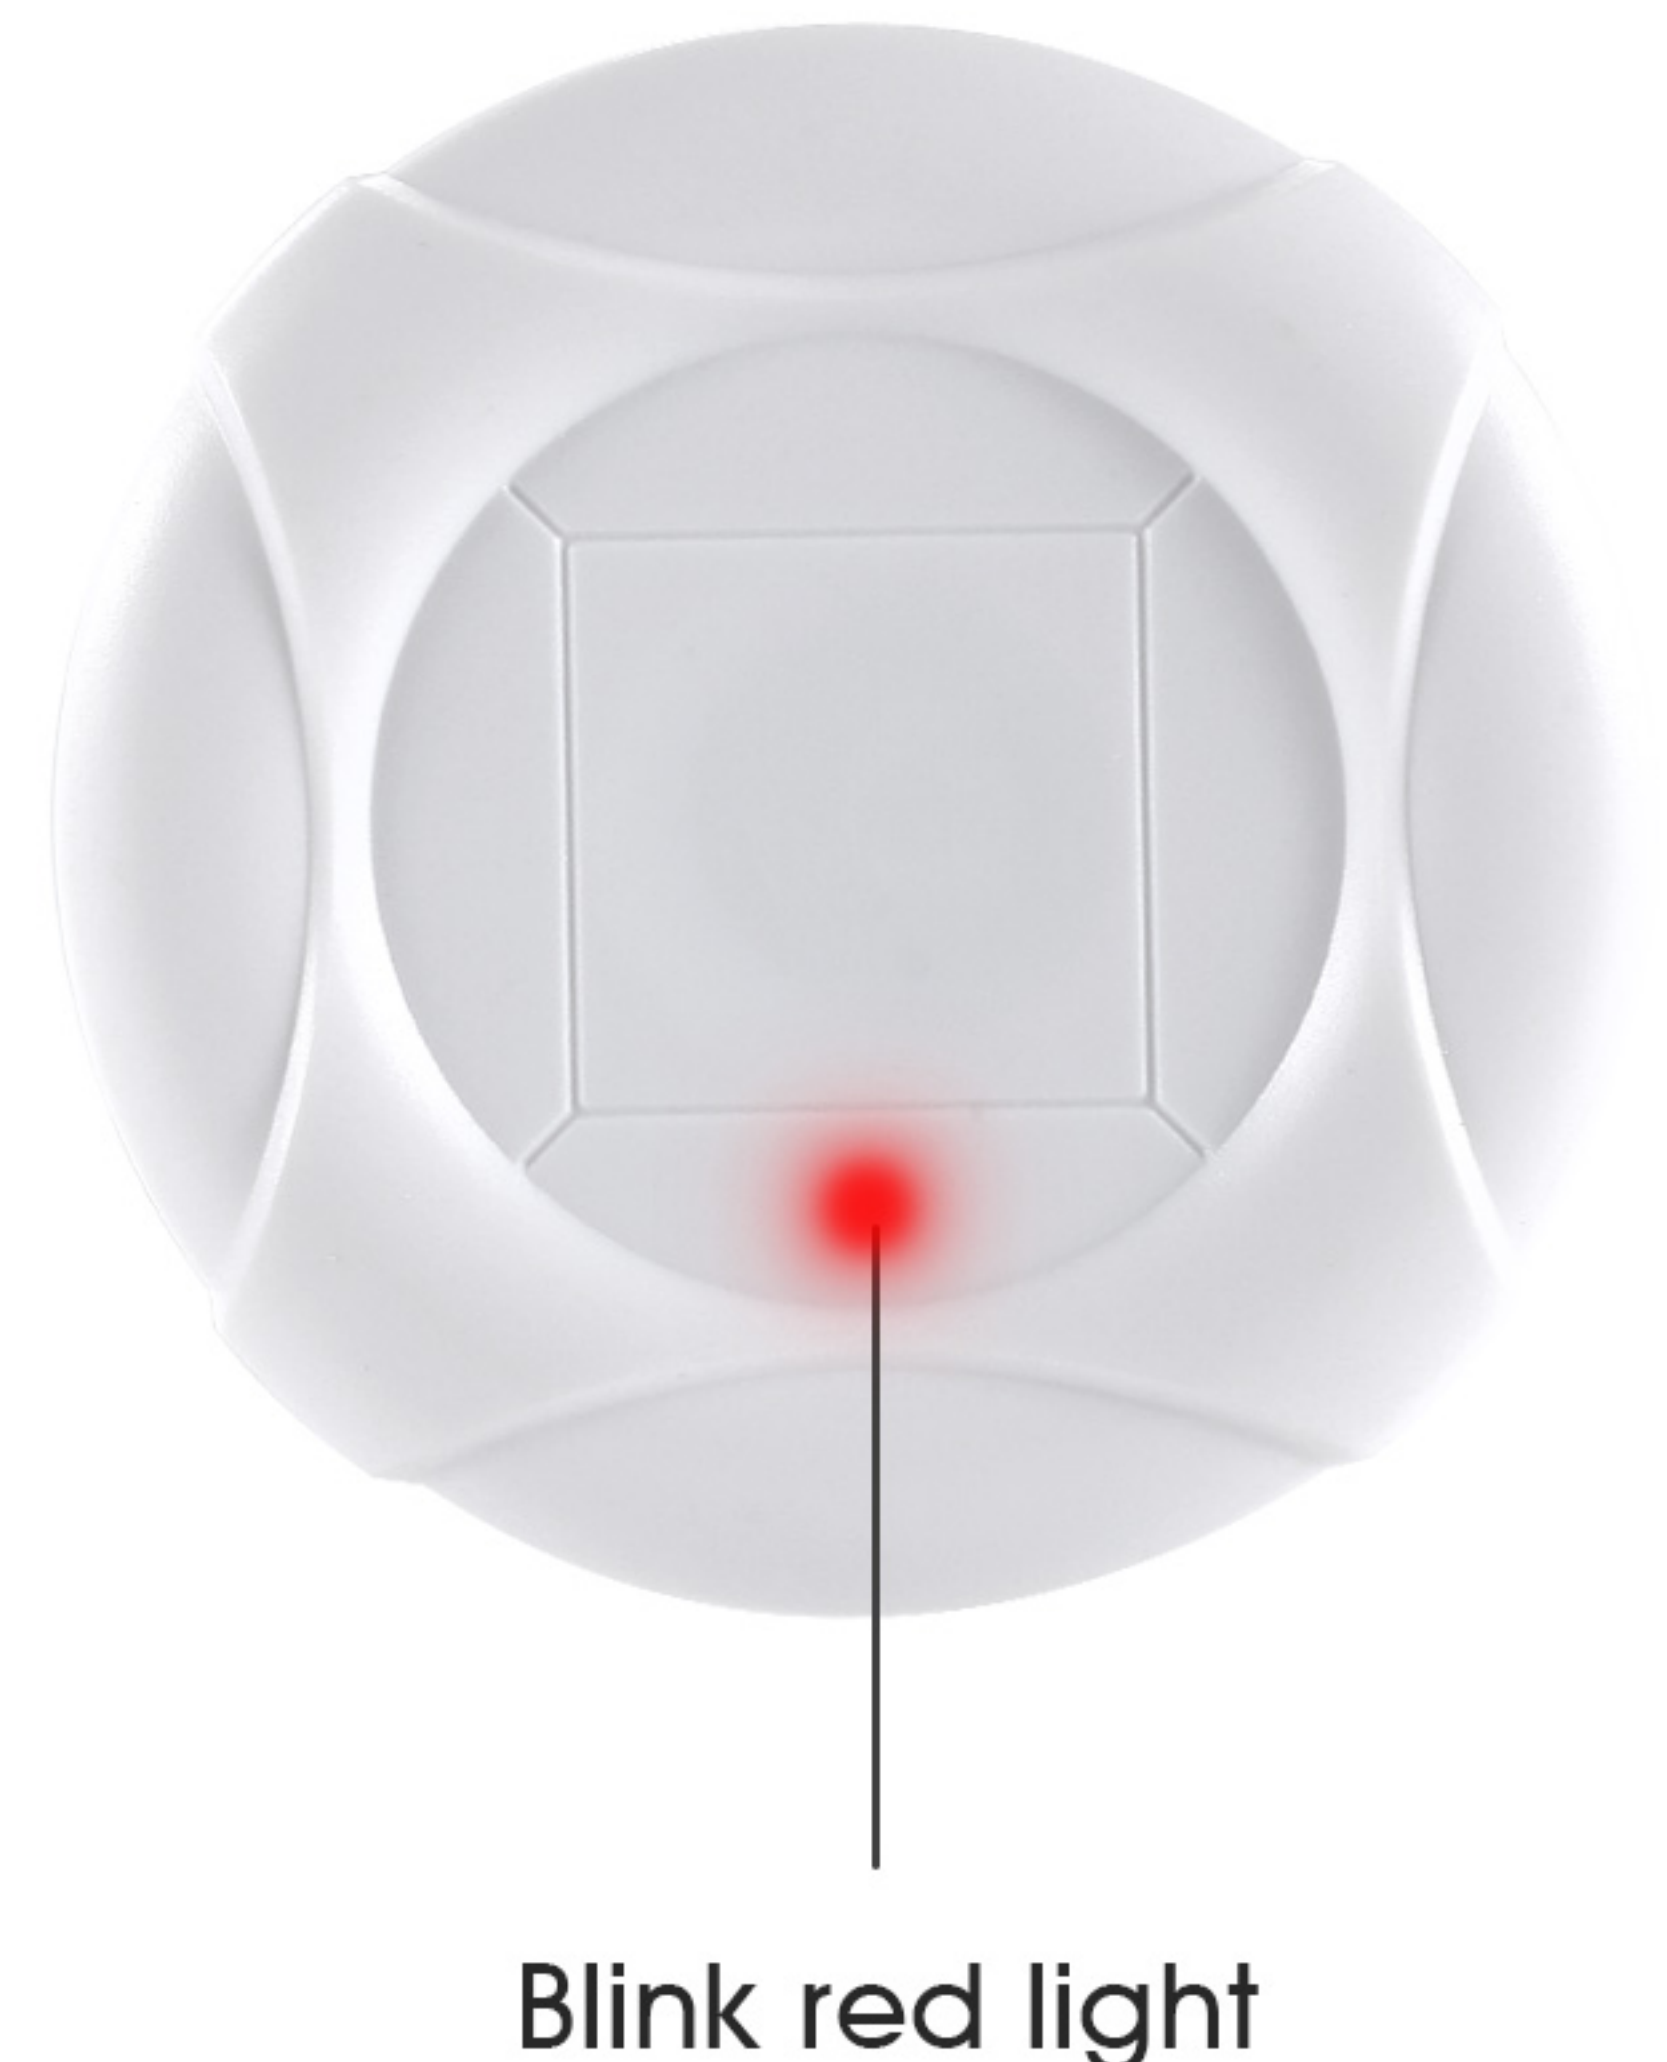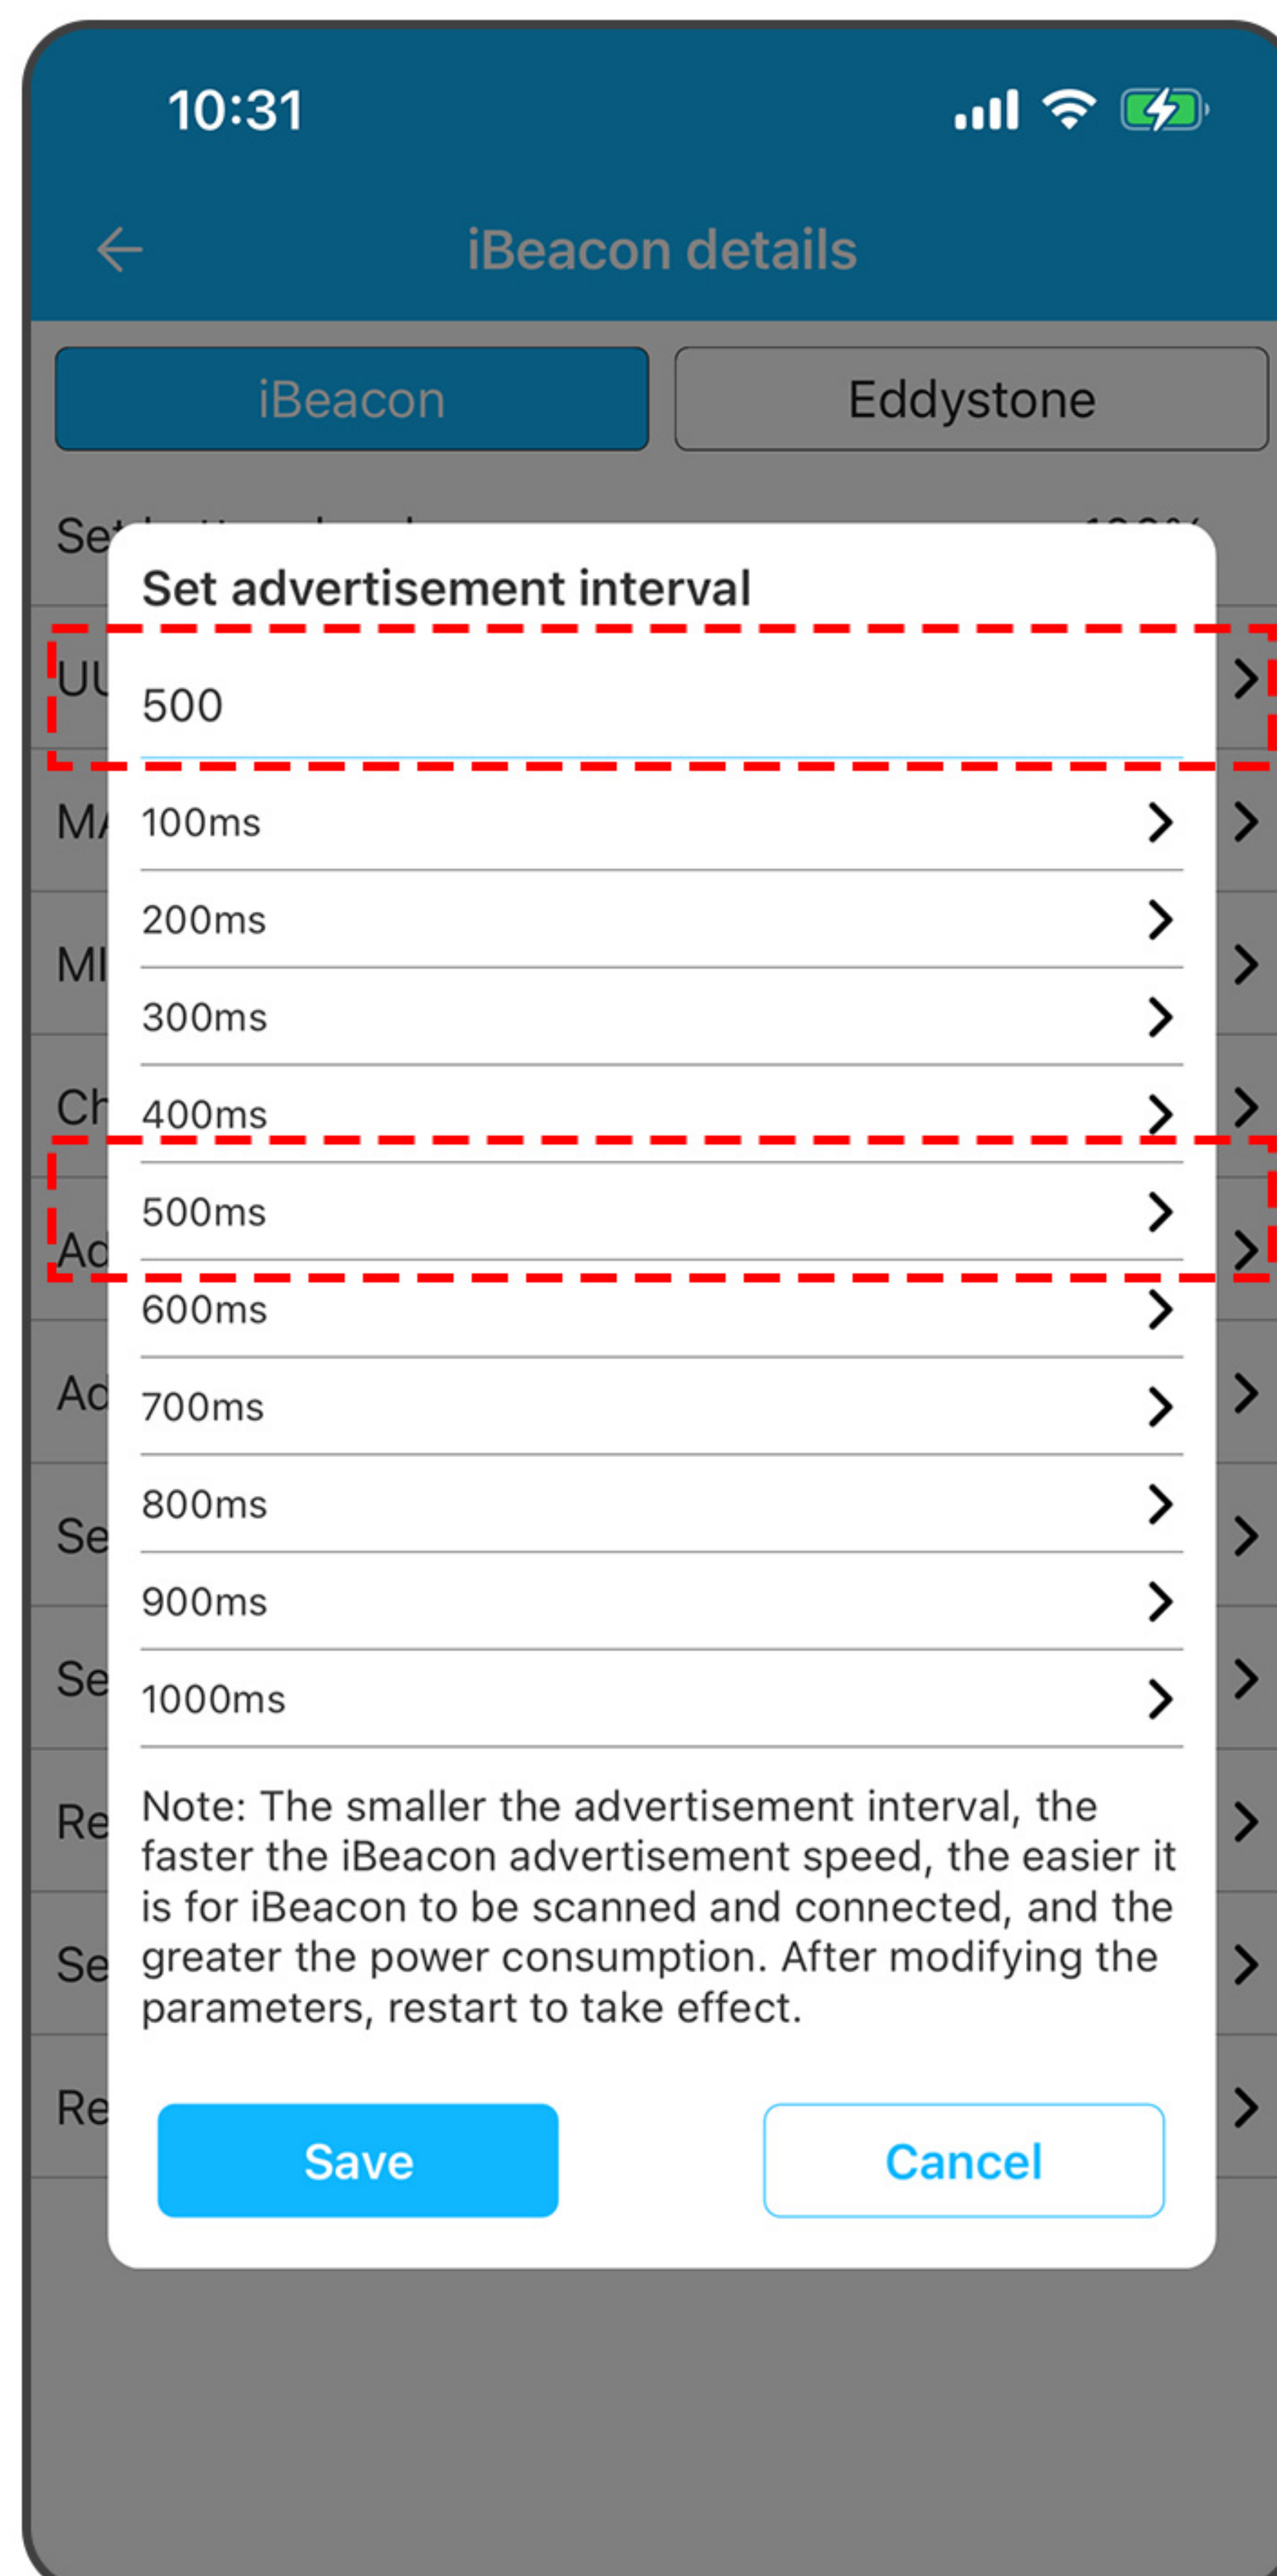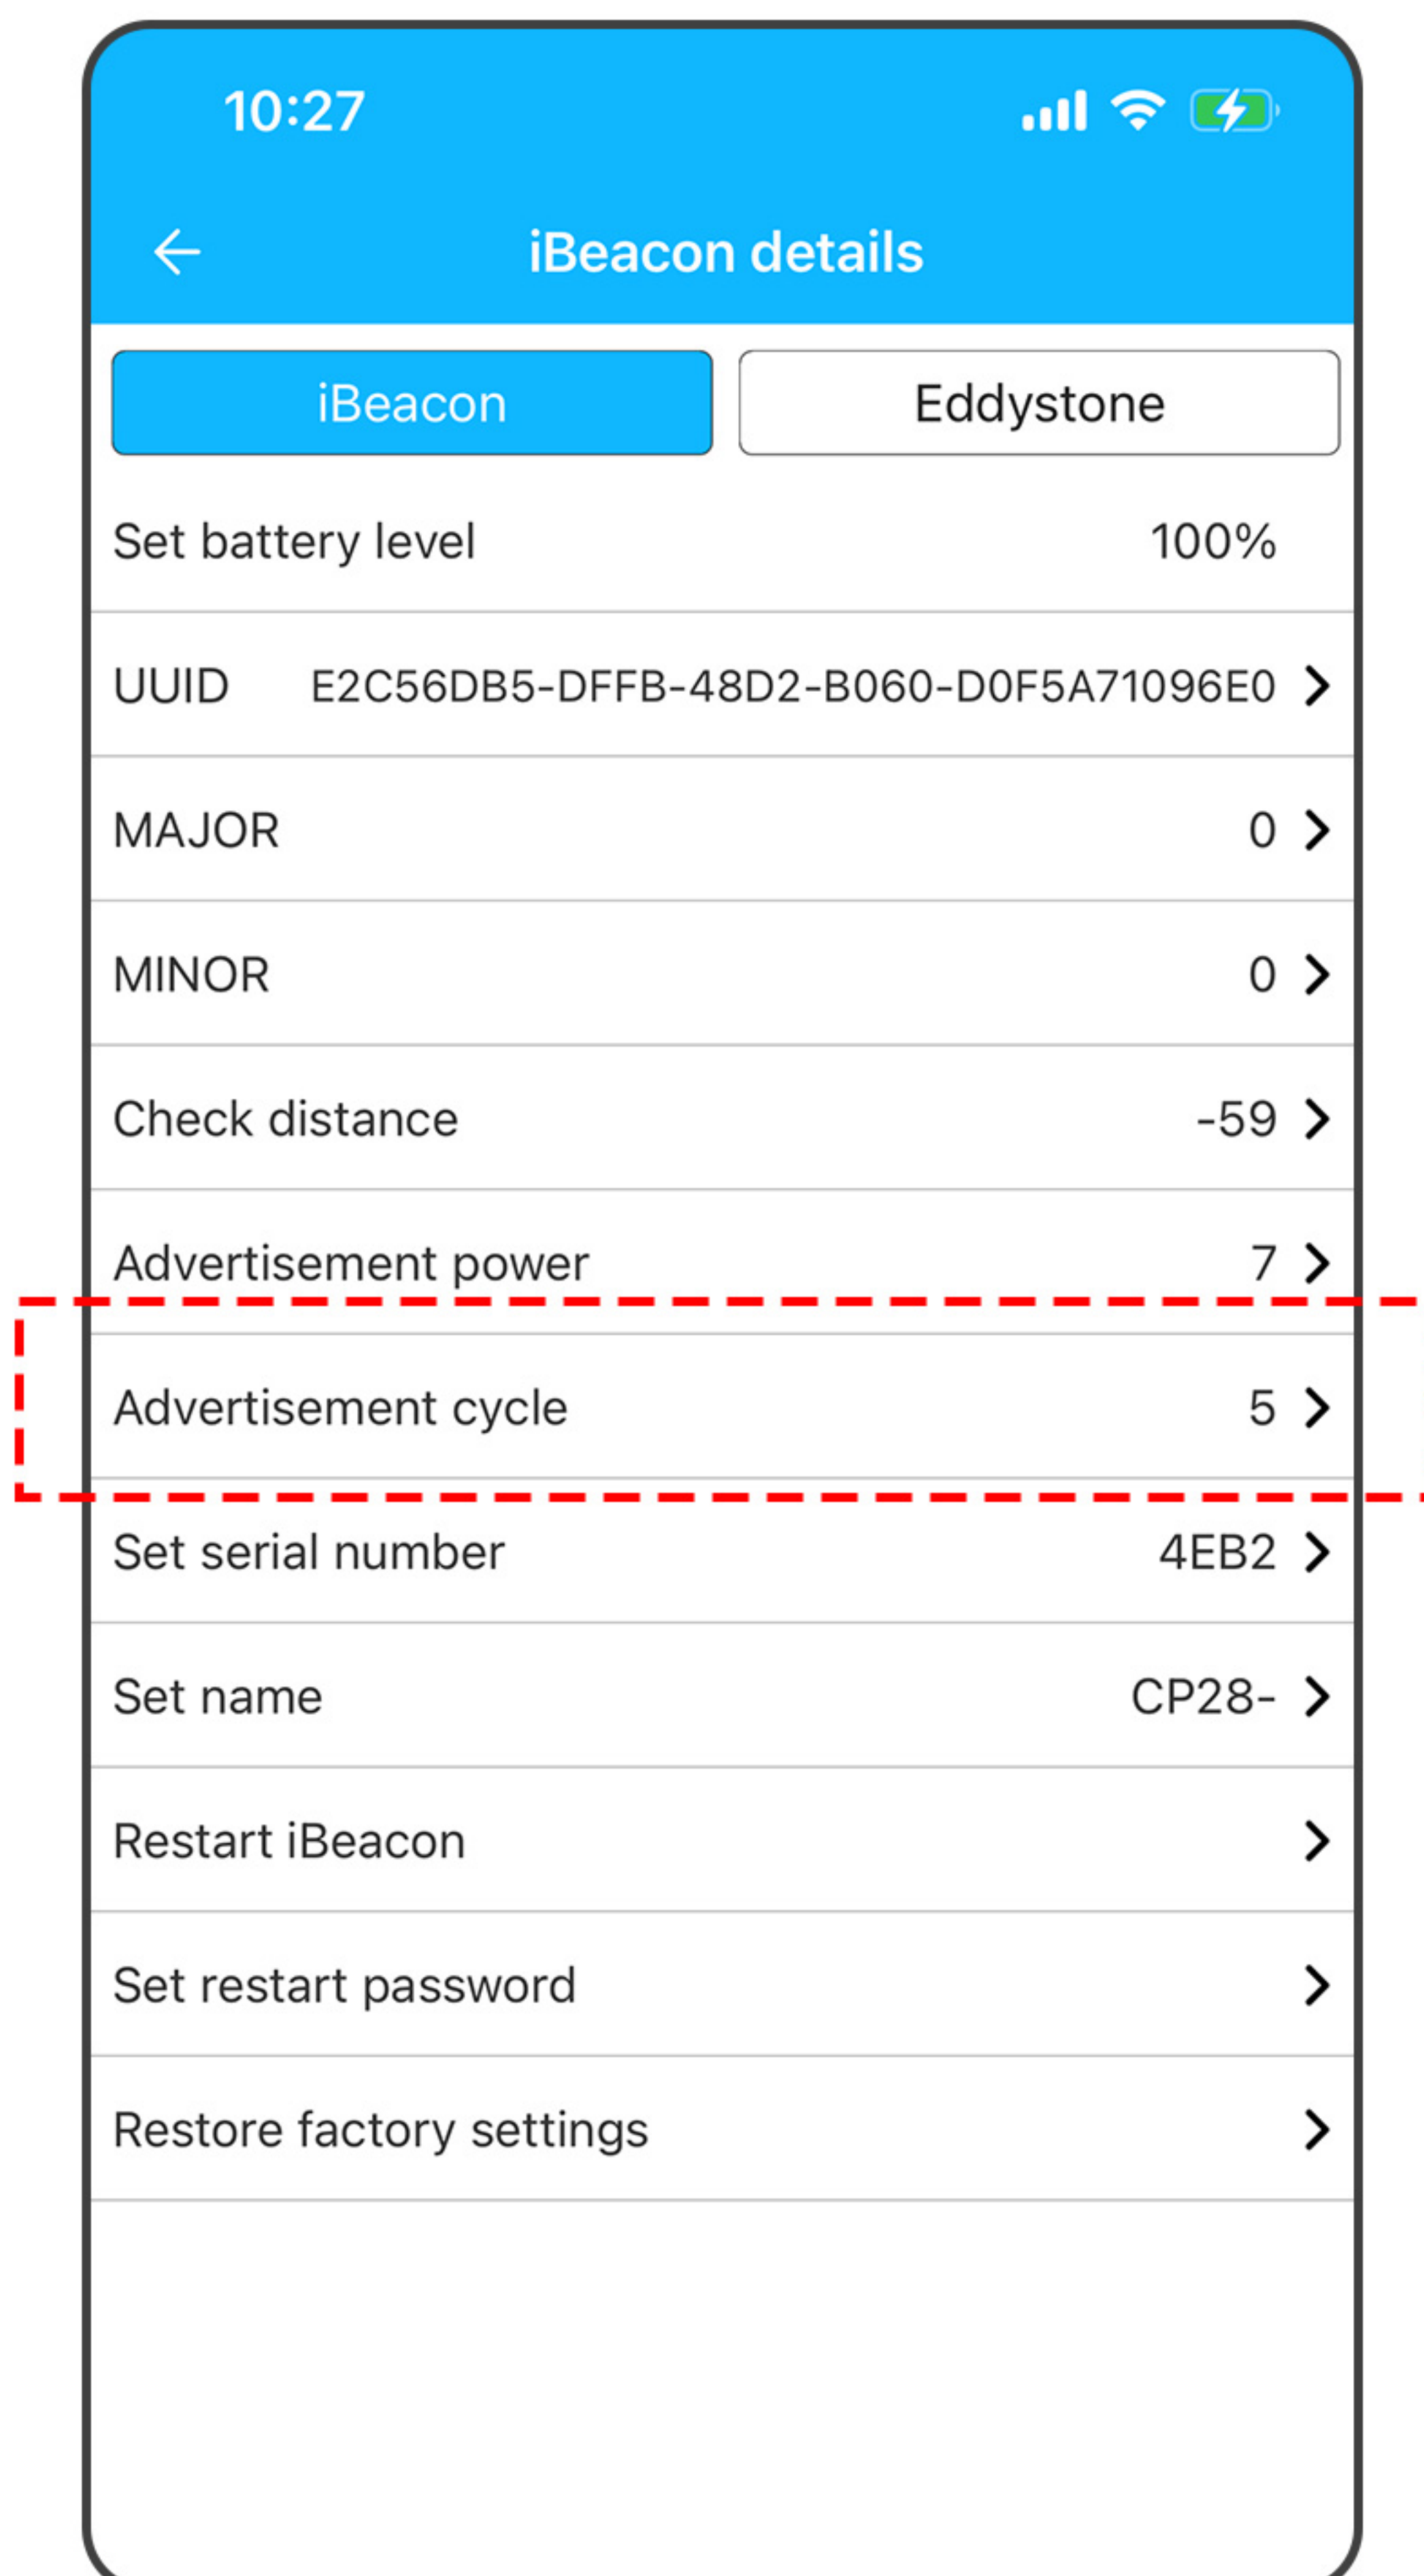

Product restart after setup is complete, restart password: dx1234.

